

Mondrian MR5

Ø 45 mm



Main characteristics

- 230 V AC - 50 HZ
- Mechanical limit switch
- Built-in emergency operation
- Built-in 433.92 MHz radio receiver



Shutters



Awnings



Emergency operation



Radio-based

Specific features

Can be used on a 50 mm round or octagonal tube.

Manual mechanical limit switch with screw-based progressive adjustment.

Manually activated with emergency wand.

Reduction ratio: 1:24.

Connection cable included: 2.5 m.

Control accessories



TRANSMITTERS/ TIMERS

Transmitters with 1-2-5-15 channels.
Timers with 1-5 channels.



WEATHER

Sensors and weather stations.



BACK KLT

Awning protection, radio device.



RELEASE

Eyelet for manual release.



Mondrian MR5

Ø 45 mm



KDEP#TEN2PA4S122

Dimensions (mm)

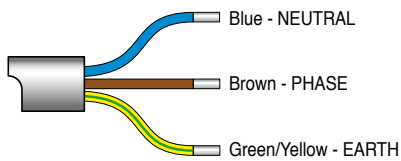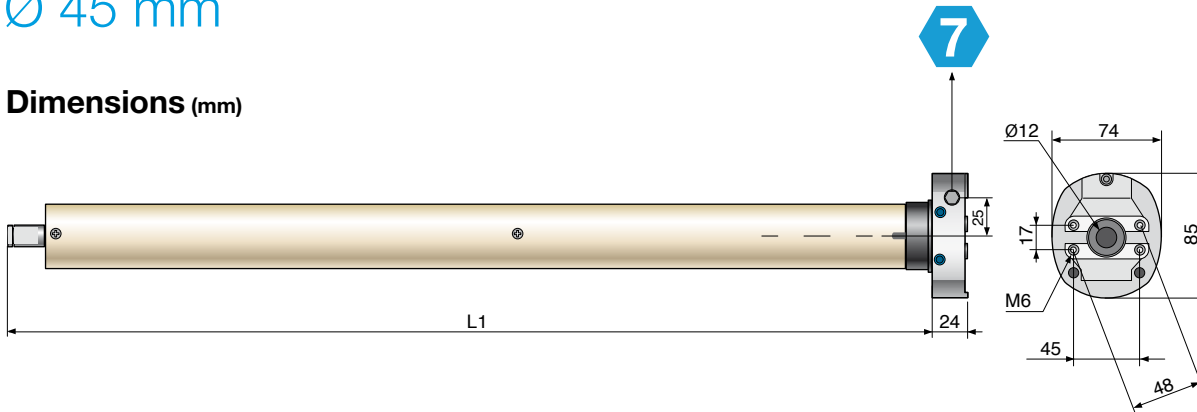

Mondrian MR5

CODE

001Y5020A151MOMR 001Y5030A151MOMR 001Y5040A151MOMR 001Y5050A121MOMR

Technical information

Torque (Nm)	20	30	40	50
Speed RPM (turns/min)	15	15	15	12
Hoisted weight (kg)*	36	55	74	92
Limit switch turns (turns)	23	23	23	23
Duration of operation (min)	4	4	4	4
Power draw (A)	0.65	0.83	0.86	0.89
Power (W)	145	191	198	205
Protection rating (IP)	44	44	44	44
Length (mm) = L1	696	756	756	756
Weight (kg)	2.75	3.2	3.5	3.5
Package dimensions (mm)	810x120x120	810x120x120	810x120x120	810x120x120
Weight of packaged motor (kg)	3.15	3.6	3.9	3.9
Cable length (m)	2.5	2.5	2.5	2.5
Cable cross-section (mm) ²	3G 0.75	3G 0.75	3G 0.75	3G 0.75

* Load calculated for 70 mm roller.

PRODUCTS



www.came.com