


# CATALOG AUTOMATIC DOORS 2024

MORE THAN  
**50+**  
YEARS





**CAME**   
MORE THAN TECHNOLOGY

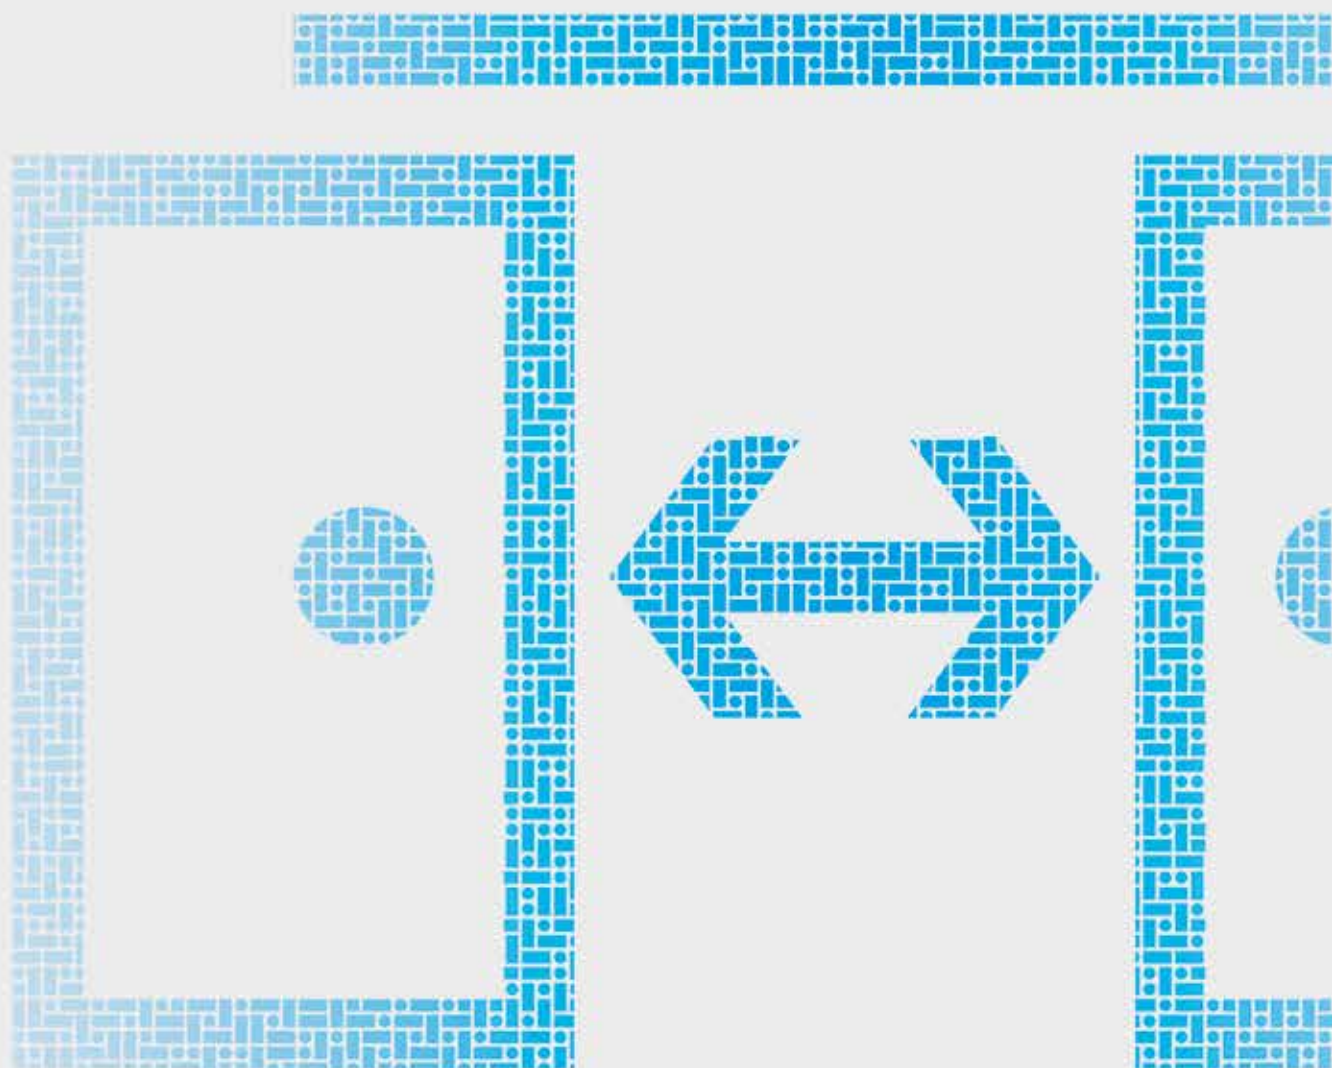

**CAME** 

# AUTOMATIC DOORS

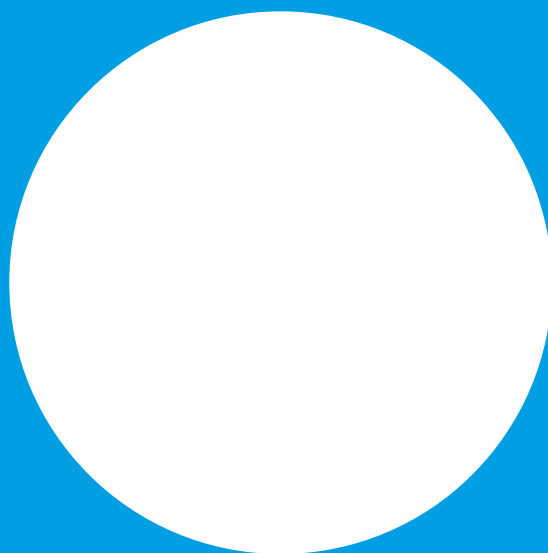

**CAME.COM**

<b>4</b>	<b>VISION</b>
<b>5</b>	<b>MISSION</b>
<b>6</b>	<b>FOR 50 YEARS WE HAVE BEEN SPEAKING ABOUT QUALITY LIVING IN EVERY LANGUAGE IN THE WORLD.</b>
<b>8</b>	<b>CAME'S RANGE</b>
<b>18</b>	<b>OUR WORLDWIDE NETWORK</b>
<b>20</b>	<b>TRAINING THAT MAKES A DIFFERENCE</b>
<b>22</b>	<b>WE ARE THE QUALITY WE WANT TO ACHIEVE</b>
<b>24</b>	<b>BRUSHLESS MOTORS FOR MAXIMUM EFFICIENCY</b>
<b>26</b>	<b>DIRECT DRIVE SYSTEM FOR MAXIMUM SILENCE</b>
<b>27</b>	<b>SIMPLE INSTALLATION</b>
<b>29</b>	<b>A SELECTOR FOR EVERY NEED</b>
<b>30</b>	<b>DUAL RAIL: THE INNOVATIVE SYSTEM FOR TELESCOPIC DOORS</b>
<b>31</b>	<b>FLUO-SL EMERGENCY</b>
<b>32</b>	<b>AUTOMATIC SWING DOORS</b>
34	STANDARD SWING DOOR INSTALLATIONS
35	TRANSMISSION ARMS
36	FLUO-SW
38	FLUO-SW LIGHT - HEAVY
40	FLUO-SW SPRING
<b>44</b>	<b>AUTOMATIC SLIDING DOORS</b>
46	SLIDING DOORS: STANDARD INSTALLATIONS
48	BEAM DIMENSIONS
50	BEAM SECTION SCALE 1: 2
52	FLUO-SL
54	FLUO-SL BASIC
56	FLUO-SL STANDARD
58	FLUO-SL HEAVY
60	FLUO-SLM MAGNUM
62	FLUO-SLT TELESCOPIC
<b>64</b>	<b>ACCESSORIES FOR AUTOMATIC DOORS</b>
66	ACCESSORIES - SLIDING AUTOMATIONS COMPLETION
67	ACCESSORIES - PROFILES FOR SLIDING AUTOMATIONS IN KIT
70	ACCESSORIES - CONTROL AND SAFETY
72	ACCESSORIES - SAFETY GLASS LEAVES WITHOUT HOLES THICKNESS 4+4 OR 5+5 MM
73	ACCESSORIES - TEMPERED GLASS LEAVES WITH HOLES THICKNESS 8- 10- 12 MM
74	ACCESSORIES - FRAMED LEAVES
75	ACCESSORIES - ANTI-PANIC PUSH-TO-OPEN SYSTEM FOR FRAMED LEAVES
<b>77</b>	<b>ANALYTICAL INDEX</b>

# VISION

## VISION

We believe in a world in which sustainable technological innovation is making people's lives easier, safer and more comfortable

# MMS



## MISSION

To create a global offer of high-quality technology solutions and products for automation, smart homes, access control and security able to improve the lives of our customers and the work of our partners

**CAME**   
MORE THAN TECHNOLOGY

# FOR 50 YEARS WE HAVE BEEN SPEAKING ABOUT QUALITY LIVING, IN EVERY LANGUAGE IN THE WORLD.



CAME has catered to people's needs for 50 years by using technology as a key to a quality life. Every project drives our innovation and focus to make people's lives as comfortable as possible. CAME is a company where skills and experience come into play. Its know how blends functionality and design continuously improving performance.

You are sure that you can rely on professionals able to transform our innovations into solutions, to create customized automation proposals integrated with the best connectivity and mobility technologies. CAME and its partners, together, to satisfy increasingly demanding customers with varying culture and needs, in order to transform living spaces into more intelligent and safe places.



**CAME † BPT**

**CAME † URBACO**

**CAME † ÖZAK**

**CAME † PARKARE**

**CAME † KMS**

**CAME † NEPOS**

**CAME † ENTROTEC**

## **ALWAYS ONE-STEP-AHEAD**

CAME is a market-leading brand that makes integrated automation solutions, video-entry, access control and parking systems for the public and private sectors.

The CAME Group boasts a series of highly specialized companies. Together they cover a large share of their market. The group delivers cutting-edge solutions for the residential, business and urban segments. Whether its home automation or heating control, road barriers and high-security bollards, or automatic doors and sectional industrial doors, CAME Group is a key player.

Today CAME is set on one, distinct corporate vision, which makes the organization a cutting-edge technological partner.



## RESIDENTIAL SOLUTIONS



We have taken the idea of home automation much further and adopted a comprehensive home automation vision in which each device is fully integrated and functioning in people's lives. Today, automation is at the heart of the home, managing entrances and windows, controlling blinds and shutters, video entry systems and temperature control.



## BUSINESS SOLUTIONS



For every public venue, our offer provides the most sophisticated systems for controlling accesses and the most evolved solutions for burglar alarms, video entry systems and barriers for parking facilities. Small and large enterprises, businesses, large buildings: the automation systems for Building Automation designed by CAME provide control and safety in small as in large communities.

## URBAN SOLUTIONS



The complexity involved in living spaces and in mobility flows require ever greater protection and security, plus enhanced reactive capacity and greater know-how. Our offer is geared to meet the different automation needs for urban planning and architectural scenarios. CAME solutions are engineered for managing safety and control in large works and for contributing to the planning of urban spaces making them "Safe and Smart", as called for in today's fast-paced, metropolitan centers.





# PARKING SOLUTIONS

## SPK

Ideal solution for large parking facilities with an innovative approach to service.

## PKE

Ideal solution for large parking facilities with special configuration requirements

## PKM

Ideal solution for small and medium sized parking facilities

## LINCE

The software platform for management, monitoring and real time remote reporting via smartphone, tablet or PC. Multi-parking management with users and subscriptions centralization, for validity on all systems. Datacenter with service continuity and servers automatic scalability. 360° assistance and service



Find out more on [came.com/parkare](http://came.com/parkare)

**CAME**  **PARKARE**



# ACCESS CONTROL SYSTEM

## ACS01

The access control system specifically developed to provide a practical solution for different scenarios. Easy to use via the web interface, it is capable of controlling a single gate through card reader, or of managing a complex system with many gates, several control devices and a potentially infinite number of users.



Find out more on [came.com/acs01](https://came.com/acs01)

**CAME** 

# VEHICULAR ACCESS CONTROL



## FIXED AND MOBILE BOLLARDS

For delimitation of traffic routes, parking facilities or areas where access to vehicles is prohibited

## AUTOMATIC BOLLARDS

For urban areas protection and vehicle flow regulation in both public and private areas

## MANAGEMENT AND CONTROL

An integrated system that allows centralized remote management of all accesses with retractable bollards



## HIGH-SECURITY BOLLARDS

For the protection of strategic access points and sensitive facilities against ramming vehicles

## ROAD BLOCKERS

The highest level of burglar-proof security, to prevent access by unauthorized vehicles

Discover the SMART & SAFE solutions at [came.com/urbaco](http://came.com/urbaco)  
Discover the full range on [came.com/ozak](http://came.com/ozak)

**CAME**  **URBACO**  
**CAME**  **ÖZAK**

# PEDESTRIAN ACCESS CONTROL



## TURNSTILES AND SPEED GATES

For access management and control in settings with high design and easy passage requirements

## HIGH-SECURITY TURNSTILES

For access control in locations that require high levels of protection



Find out more on [came.com/ozak](https://came.com/ozak)

**CAME**  **ÖZAK**





# AUTOMATIC DOORS

## DISCOVER THE SOLUTIONS FOR AUTOMATIC PEDESTRIAN DOORS

A complete line of automatic sliding or swing doors, equipped with state-of-the-art electronics, available in different versions, also for special uses or emergency exits. Equipped with Brushless motors for maximum efficiency and reliability, and the innovative Direct Drive system that ensures exceptionally quiet movements.

Find out more on [came.com/pedestrian-doors](https://came.com/pedestrian-doors)

**CAME** 



# VIDEO ENTRY SYSTEMS

## INDOOR RECEIVERS

Intercom and video intercom-entry solutions with modern design and technology

## ENTRY PANELS

Advanced single-block or modular devices for single users or for large housing complexes



Find out more on [came.com/videoentry](https://came.com/videoentry)

**CAME** 

# SOLUTIONS FOR AWNINGS AND BLINDS

## AUTOMATIONS FOR ROLLING SHUTTERS

A complete series of automation devices for any installation setting

## ACCESSORIES FOR AWNINGS

Components and fabrics for technical indoor curtains



Find out more on [came.com/blinds-and-awnings](https://came.com/blinds-and-awnings)

**CAME** 



# SECTIONAL DOORS

## SECTIONAL DOORS FOR HOMES

Solutions that combine quality and design to enhance the aesthetics of any living environment

## SECTIONAL DOORS FOR INDUSTRIAL SETTINGS

Robust, reliable and secure solutions that ensure maximum efficiency for your business



Find out more on [came.com/go](https://came.com/go)

**CAME** 

# SMART HOME SYSTEMS

Simple solutions for connecting different devices inside and outside the home. The QBE wireless system communicates with awnings, blinds, lights, thermostats and automations for control from smartphones or through Amazon Alexa.



Find out more on [came.com/smart-home](https://came.com/smart-home)



# TEMPERATURE CONTROL

A complete range of thermostats and chronothermostats suitable for any setting. Durable and reliable devices equipped with the latest technology, such as LCD display, capacitive buttons, habits learning, management from smartphones or through Amazon Alexa voice commands.



TH/700



Find out more on [came.com/thermo](https://came.com/thermo)



# OUR WORLDWIDE NETWORK.

## We are a worldwide network.

From the Treviso head office, home to the group's thriving core, we coordinate 11 manufacturing plants and 10 R&D units. We have subsidiaries in 20 countries and, thanks to our commercial partner and distributors, we operate in 118 countries with an integrated and global vision.

We are the technology partner for those projects that require integrated systems for improving the quality of our living space - whether private or public. Our products are made for controlling homes, managing urban venues and workplaces, of any kind, anywhere in the world.

Our Group shares common goals, which go beyond single specializations. Thanks to the synergies among all our divisions and brands, we share an operating approach that enriches our diversity.

## BRANCHES IN THE AMERICAS

Brazil  
Chile  
Mexico  
Peru  
USA

# 2000

STAFF MEMBERS AROUND THE WORLD





**CAME HQ**  
Treviso, Italy



**BRANCHES  
IN EUROPE**

- |             |                    |
|-------------|--------------------|
| Italy       | Poland             |
| Belgium     | Portugal           |
| Croatia     | Russia             |
| France      | Spain              |
| Germany     | The United Kingdom |
| Ireland     | Turkey             |
| Netherlands |                    |

**10**



R&D CENTERS

**20**

COUNTRIES WITH DIRECT BRANCHES

**118**

COUNTRIES WITH PARTNERS AND DISTRIBUTORS

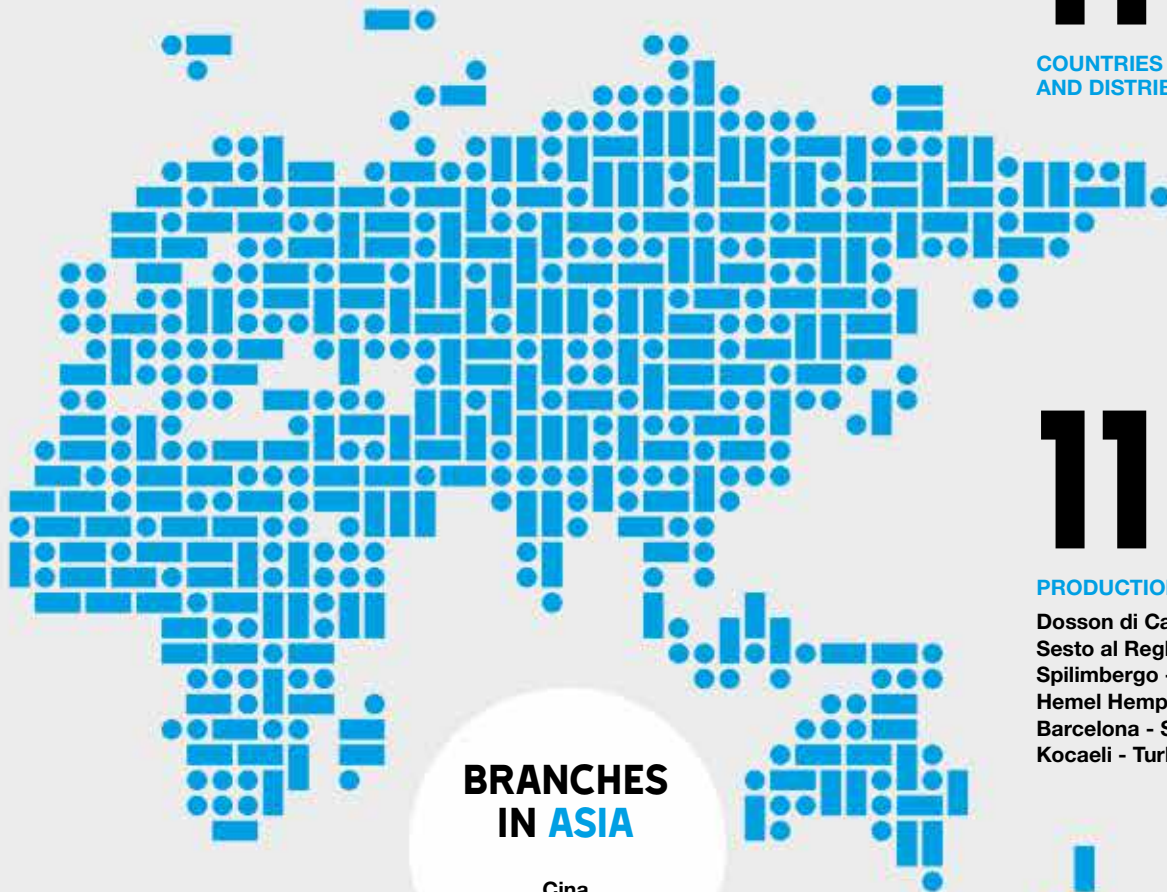

**BRANCHES  
IN ASIA**

- Cina
- United Arab Emirates

**11**

PRODUCTION PLANTS

- Dosson di Casier - Italy
- Sesto al Reghena - Italy
- Spilimbergo - Italy
- Hemel Hempstead - UK
- Barcelona - Spain
- Kocaeli - Turkey



**480**

DISTRIBUTORS AND PARTNERS WORLDWIDE

# TRAINING THAT MAKES A DIFFERENCE.



## TRAINING LAB

Professionals of this sector have a tough job, which always requires upgrading and updating. But technical and product evolution is not the only important thing; you must also be up to date on regulatory standards and customer relations, as the latter are ever more demanding in terms of efficient service.

**TRAINING LAB** is the online platform dedicated to all professionals who would like to keep up-to-date with new CAME technologies in a simple and convenient way. It is designed to enhance the experience of CAME technicians around the world and is available in several languages. A unique tool to enhance professional skills, always available through in-person courses, online webinars and e-learning programs.

Register and see the list of available courses:  
<https://traininglab.came.com/global>

## A TEAM OF PROS

CAME gives professionals the opportunity to avail themselves of a team trainer specialized in specific product lines. Our staff members have the know-how and experience to deliver finished projects, plus provide sales and technical assistance. Each course provides the attending industry professionals with all the necessary tools for their job, so they can stay abreast of the latest market developments.

TRAINING COURSES.

INVESTING IN YOUR STAFF  
BUILDING YOUR BUSINESS

## CAME TRAINING TEAM



### FOR INFORMATION AND REGISTRATION:



Access the specific training page of the [came.com/training](https://came.com/training) website



Send your request to [training@came.com](mailto:training@came.com)



Call for more information at +39 0422 15 69 511 during business hours.

Upon request, CAME will design and deliver courses, tailored around your needs, by setting up the learning path, course schedule and locations.

The training program also continues online, thanks to the webinar formula for in-depth analysis of all CAME topics.

A complete and constantly updated calendar, with schedules compatible with the work of our partners and automation professionals, to offer continuous and tailor-made updating solutions.



**WE ARE THE  
QUALITY WE  
WANT TO  
ACHIEVE.**



CAME's working methodology is based on the continuous improvement of production processes, security and relationships, but a great result can only be achieved with everyone's contribution.

This awareness has given rise to Quality Inside, a project involving CAME's women and men and the professionals who rely on our products to offer increasingly reliable and innovative solutions that improve their customers' quality of life.

Quality is our guiding principle: we want to raise all standards of production systems and make quality a widespread and shared value in all company systems.

A process of constant measurement of the results obtained, which encourages the dissemination of positive practices and the replicability of the standards achieved throughout the product design and development cycle.

This scenario brings life to an organizational structure that makes for constant, fruitful and open dialogue among the fundamental areas of the CAME system: R&D - central test lab - production - logistics - service.





## A NEW SMART PRODUCTION PROCESS FOR NEW RESULTS.

In addition to the traditional four phases aimed at continuous improvement of production processes, there is a continuous sharing process of the results obtained, that aims to spread positive practices and replicability of the standards achieved.



# 1.

### PLAN

Knowledge of motivations produces sustainable solutions.



# 2.

### DO

The plan is implemented, the process executed, the product created.



# 3.

### CHECK

The actual result of the assumptions is verified, under real conditions.



# 4.

### ACT

The problem has been solved, the improvement is achieved.



# SHARE

FOSTERING CHANGE.

LET'S PUT QUALITY INTO THE STREAM.



# BRUSHLESS MOTORS FOR MAXIMUM EFFICIENCY

CAME solutions for pedestrian automatic doors are at the forefront in terms of efficiency and reliability.

All versions, both swing and sliding, are equipped with an innovative brushless DC motor.

The absence of brushes inside the system guarantees greater performance and lower maintenance costs.

CAME motors work at low speed, around 600 rpm: in this way the mechanical wear is considerably reduced, extending the product life more than 10 times compared to traditional solutions on the market.


Lower maintenance costs and reduced assistance become the key to a successful relationship between the installer and customer.

The Brushless motor of the FLUO range is a flexible solution, which can be installed in any type of environment, both residential and commercial: it adapts perfectly to professional settings, hospitals and medical clinics, and can be used for emergency exits .

FLUO automations are designed and manufactured in compliance with the safety requirements required by European regulations. Efficiency and reliability are certified by the TUV mark.



# FLUO-SWS3: BRUSHLESS MOTOR WITH OPERATOR

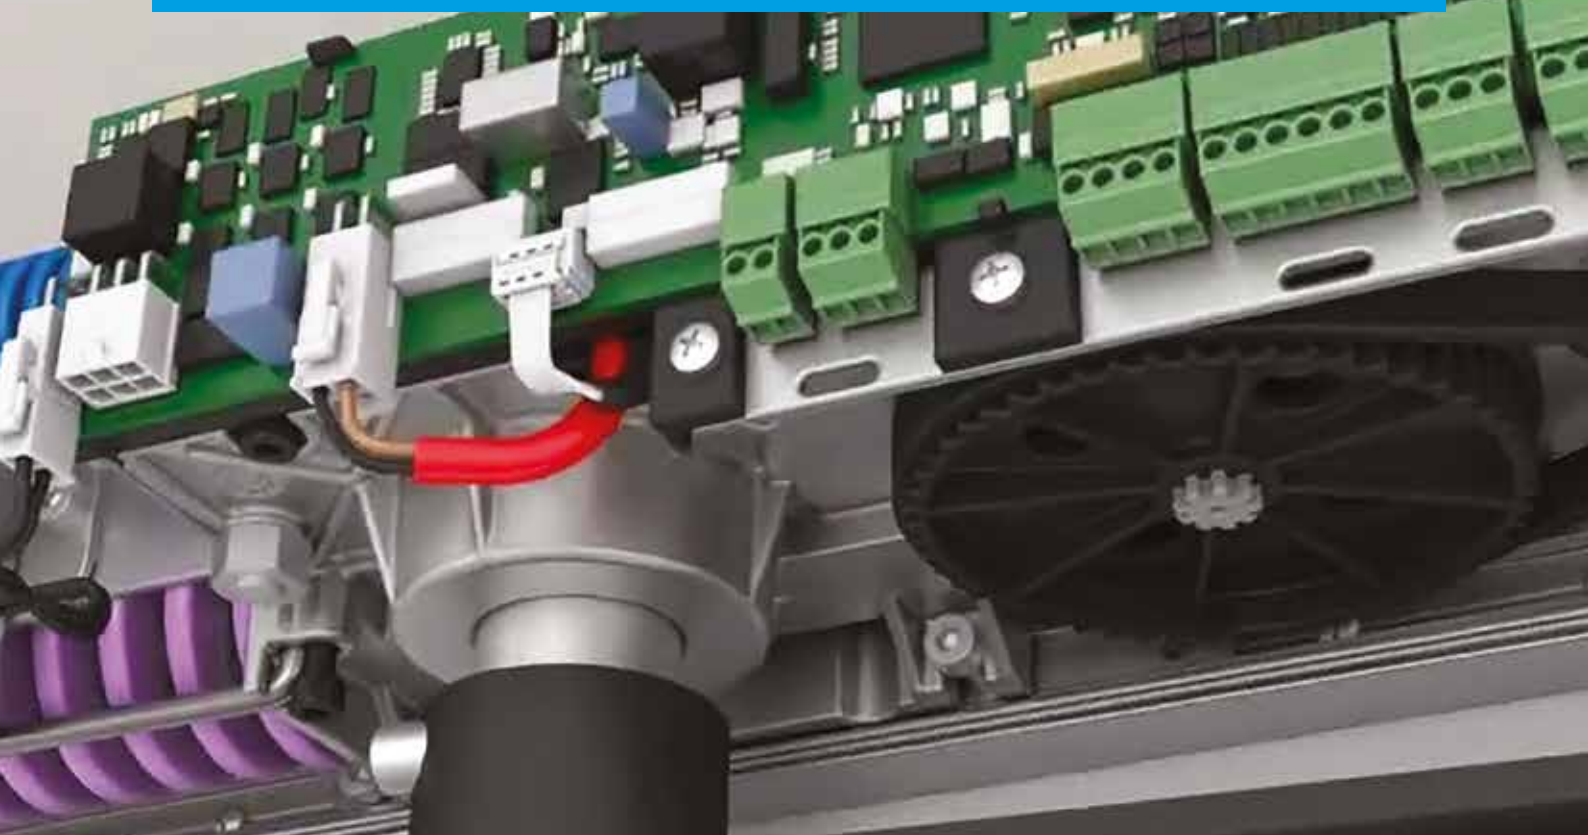

The use of brushless motors makes it possible to increase the automation efficiency, reducing electricity consumption by 30%. The operating life of a brushless motor is about ten times longer than that of a traditional motor and the frequency of extraordinary maintenance operations required is therefore drastically reduced.

The Brushless motor is connected to the operator unit by means of a belt, so as to obtain a high force for handling heavy doors, guaranteeing at the same time remarkable operating silence. The operator unit is also equipped with two springs that allow the door to close even when there is no power supply.

The large spring operates during the entire door operation and is designed to be very high performing and compact, guaranteeing mechanical closure with a smooth and safe movement.

The small spring, instead, acts only during the last 6° of closing, ensuring greater force in the final phase of the stroke, to overcome any resistance caused by locks or wind.



# DIRECT DRIVE SYSTEM FOR MAXIMUM SILENCE

The Brushless motor, equipped with a direct drive system on the belt without operator, combines high performance with low consumption.

Thanks to this technological innovation, the automations for sliding doors can work at reduced speeds, significantly reducing energy consumption.


Furthermore, the noise is almost completely eliminated thanks to the gaskets that absorb the vibrations, guaranteeing an exceptional silent operation.

## ENERGY SAVINGS SOLUTIONS

The new FLUO range is equipped with the latest generation control board, with extended range power supply (100 - 240 V) and Switch mode. The 32-bit microcontroller can be easily configured thanks to an alphanumeric display that makes the settings easy and quick.

To further simplify the installation operations, the board is supplied with a standard pre-configuration: the professional, for basic applications, can simply use the default settings without having to load new parameters.

The motor is designed to work in any condition: thanks to the Switch mode it detects the voltage and automatically switches from 100 to 240 V. The low rotation speed reduces energy consumption by 54%.

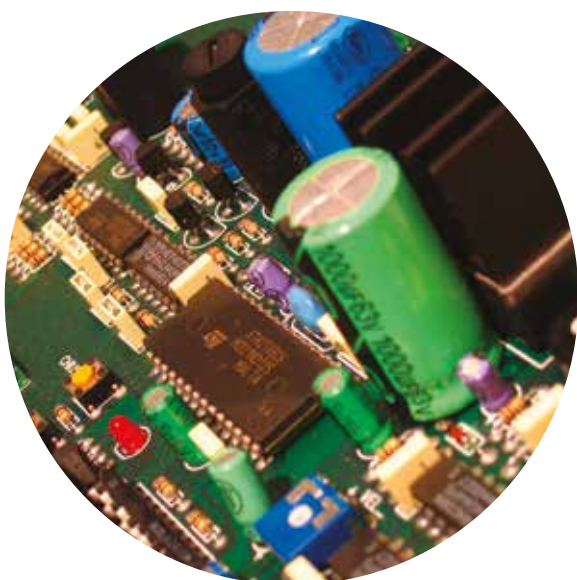

# SIMPLE INSTALLATION

CAME focuses on quick and easy installation.

The support beam, thanks to the exclusive fixing system, can be installed by only one person, minimizing the time and costs for the operation.

Even the internal components have been designed to limit the number of necessary tools, so as to make the whole job easier; in addition, the snap-on fixing mechanism facilitates the motor replacement and maintenance.

Even the sensor support follows the same innovation, and is directly connected to the bracket instead of to the body.

Thanks to the fixing by magnets it is not necessary to disconnect the wires or remove the cover, so all operations become extremely quick and simple.

**Working on automation is even more faster and safer.**





# A SELECTOR FOR EVERY NEED

The new function selectors, with a simple and intuitive interface, are available in two versions:

- 818XA-0074 selector with capacitive touch screen and integrated MiFare transponder module.
- 818XA-0075 basic model selector with numeric keypad.

The user can choose between 4 different levels of selector control:

- Control always active: function selector always accessible.
- Control by touching the selector: function selector accessible by touching the CAME logo.
- Contactless control via badge.
- Control by numerical code on basic model.

The selector switch is the main accessory for automation control and supports many functions:

- Door open.
- Automatic bidirectional opening.
- Automatic unidirectional opening.
- Partially automatic opening.
- Door closed.

The selector also shows indications of malfunctions or requests for periodic maintenance of the device

818XA-0074



818XA-0075




# DUAL RAIL: THE INNOVATIVE SYSTEM FOR TELESCOPIC DOORS

Installation and maintenance of telescopic doors is always very complex due to the difficulty of accessing the secondary leaf.

The DUAL RAIL system allows easy access to the secondary leaf because it leaves the sliding guide of the primary leaf suspended, connecting it to the profile of the box using modular brackets with front coupling.

The return system is characterized by a dual pulley transmission that allows to adjust the two doors separately, moving them by hand in a much simpler way than traditional telescopic solutions.

Once the installation or maintenance operations are completed, a quick locking system makes the two pulleys work again.

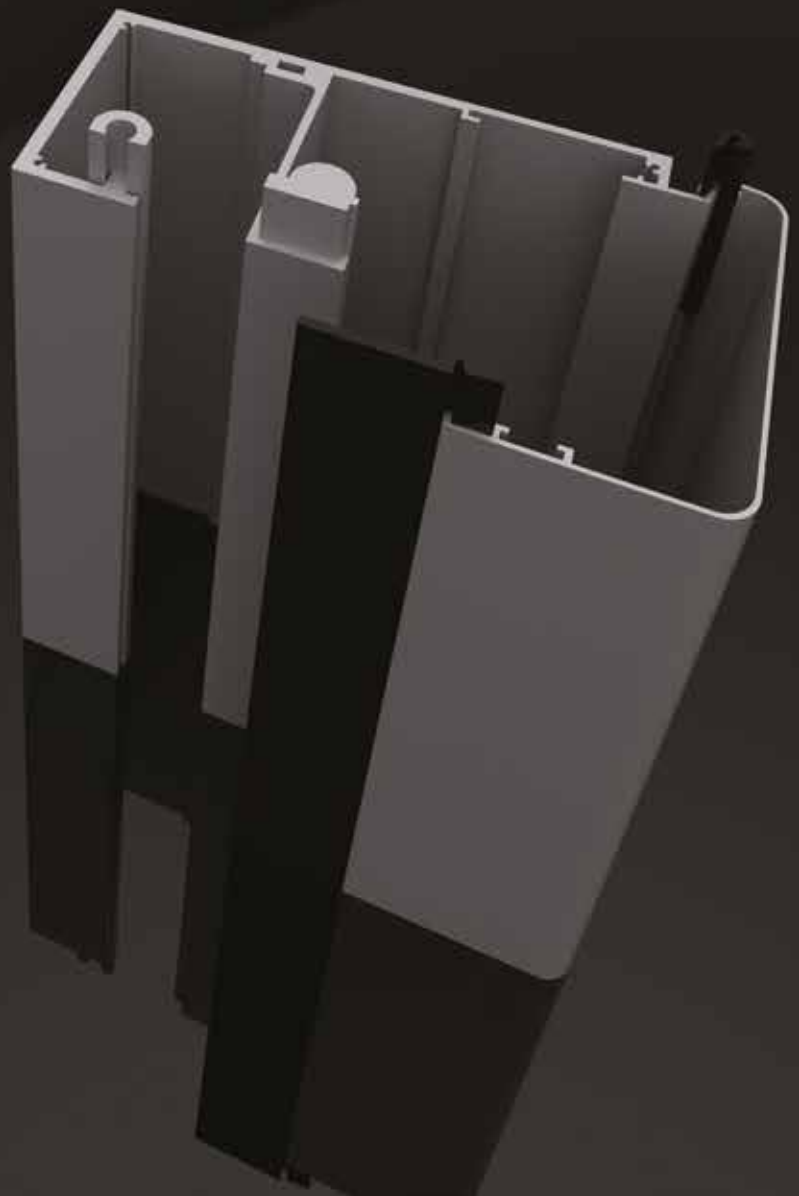



# FLUO-SL EMERGENCY


The international safety regulations require that emergency exit doors can be opened even if a power failure occurs. Usually, to meet this need, the automation requires the installation of bulky and inconvenient additional modules to complete the system.

CAME solutions use a Brushless motor with double winding and direct drive on the belt, without operator. The sophisticated control system constantly monitors the position and speed of the leaves to optimize torque, improving efficiency. The two windings are completely independent of each other and guarantee the door opening even in the event of an electrical failure or a blackout.

The electronic control unit has an additional emergency board installed directly on the main board and connected through a serial communication CAN bus.

Even if the two boards are installed together, the emergency board is completely independent from the main board because it is provided with its own microcontroller.

The European standard EN 16005, specifies the requirements for motor-powered pedestrian doors installed also in escape routes. The great advantage of FLUO EMERGENCY consists in being able to install, in emergency routes and exits, automations approved for this purpose, with standard sliding leaves, to replace the traditional automations with sliding push-to-open leaves, in the direction of emergency exit.

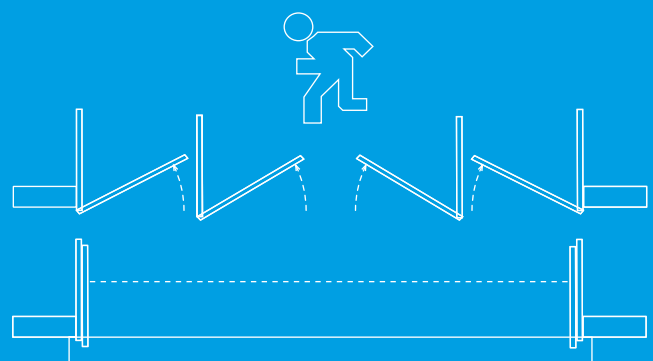

# AUTOMATIC SWING DOORS

LIGHT

HEAVY

SPRING

**CAME** 

[CAME.COM](https://www.came.com)



**FOR 1 LEAF**  
UP TO 200 KG - 800 MM

**FLUO-SW2**  
**LIGHT**

**FOR 1 LEAF**  
UP TO 300 KG - 800 MM


**FLUO-SW3**  
**HEAVY**

**FOR 1 LEAF**  
UP TO 300 KG - 800 MM


**FLUO-SWS3**  
**SPRING**

# STANDARD SWING DOOR INSTALLATIONS

## 1 SWING LEAF

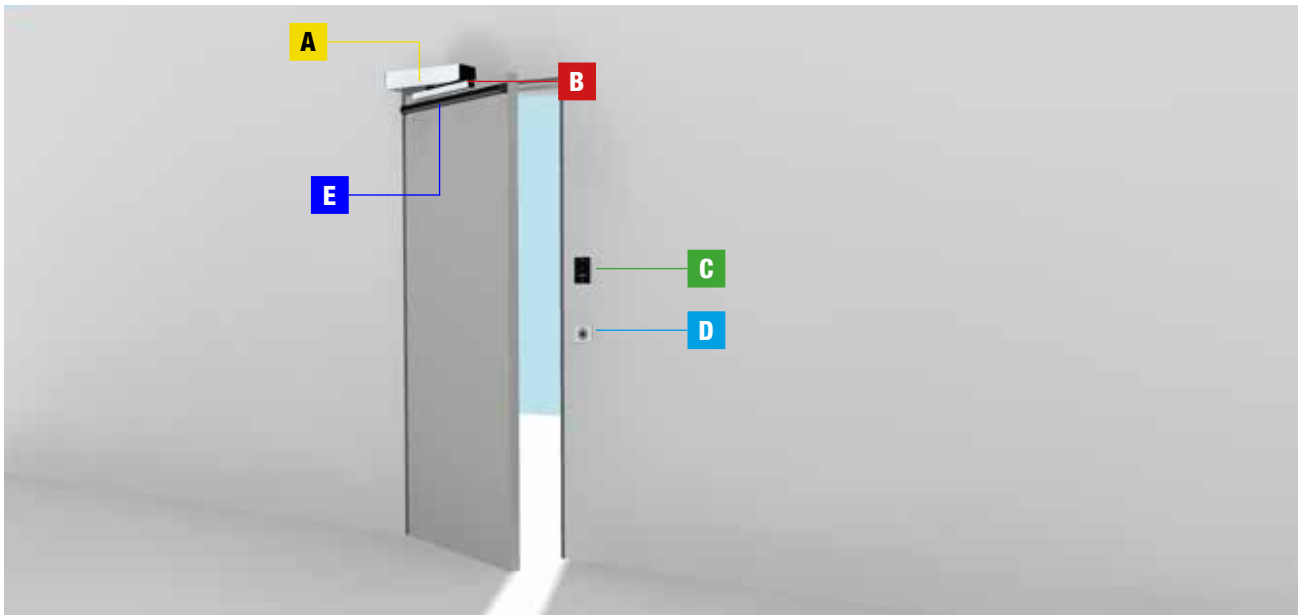

## 2 SWING LEAVES

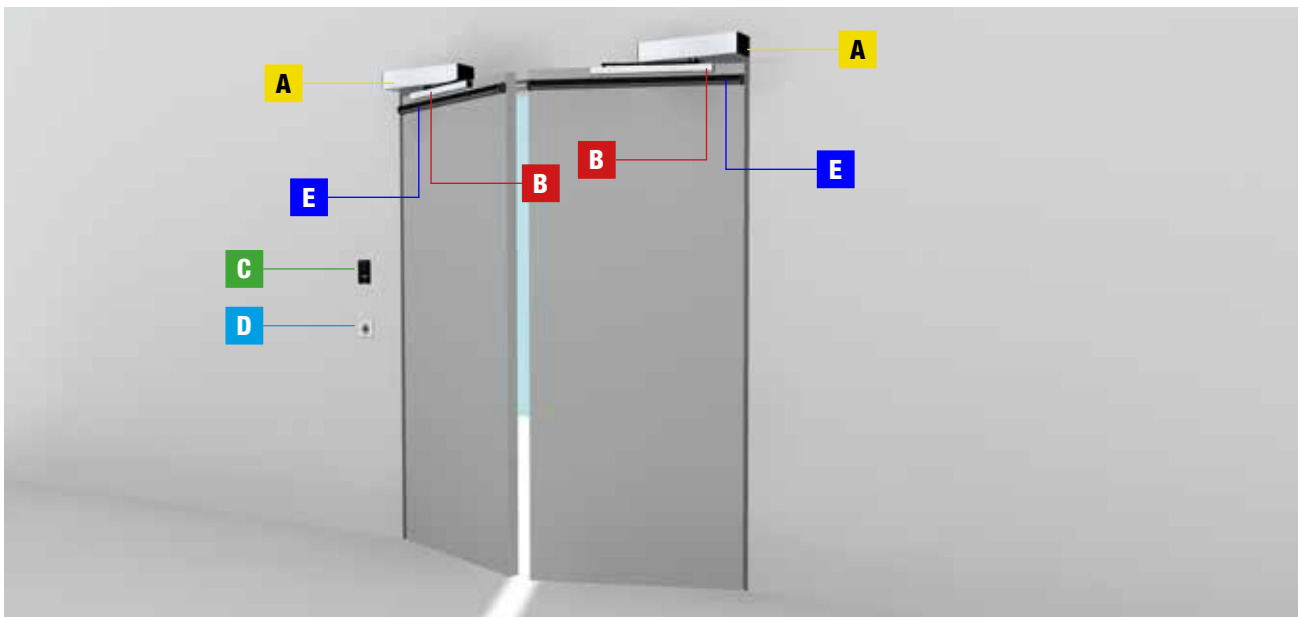

### A

- Automation (control board-fitted operator)
- Power outage emergency operation board
- Control panel

### B

- Transmission lever

### C

- Functions selector


### D

- Swipe sensor

### E


- Safety/control sensor

## TRANSMISSION ARMS




### STRAIGHT ARM TO BE PULLED

To be used when the door must open from the same side where the automation is installed.  
Equipped with mechanical limit switch.



### ARTICULATED PUSH ARM

To be used when the door must open on the opposite side from where the automation is installed.

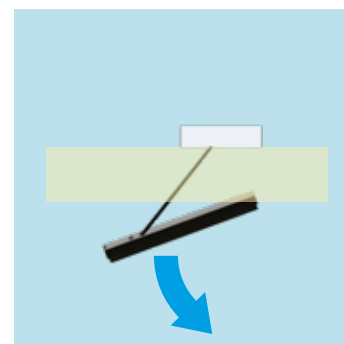

### STRAIGHT PUSH ARM

To be used when the door must open on the opposite side from where the automation is installed.  
Equipped with mechanical limit switch.



### ALSO A SINGLE PROFILE CUT TO MEASURE

The 2-leaf hinged configuration of FLUO-SW3 can also be made using a single containment profile, cut to measure on customer request.



## CABLES FOR STANDARD INSTALLATION

CABLE LENGTH (m)	< 10	from 10 to 20	from 20 to 30
230V AC Power supply	3G x 1.5 mm <sup>2</sup>	3G x 1.5 mm <sup>2</sup>	3G x 2.5 mm <sup>2</sup>
818XA-0050 Features selector	UTP CAT 4 AWG24 - 4 x 0.5 mm <sup>2</sup> Bipolar twisted	UTP CAT 4 AWG24 - 4 x 0.5 mm <sup>2</sup> Bipolar twisted	UTP CAT 4 AWG24 - 4 x 0.5 mm <sup>2</sup> Bipolar twisted
818XC-0039 Mechanical selector	3 x 0.5 mm <sup>2</sup>	-	-
12 - 24 V AC - DC touch sensors	4 x 1 mm <sup>2</sup>	4 x 1 mm <sup>2</sup>	4 x 1 mm <sup>2</sup>
Command and control devices	*N. x 0.5 mm <sup>2</sup>	*N. x 0.5 mm <sup>2</sup>	*N. x 0.5 mm <sup>2</sup>

\*N. = see product mounting instructions

# FLUO-SW

Extremely silent swing door thanks to the brushless DC motor.

Fully reversible operator.  
Emergency battery.





## **EASY TO INSTALL SIMPLE TO USE**

### **EASY TO INSTALL**

There is no need for specific structures as the automation can be installed directly on the upper part of the door, easily connecting the arm  
The accessories can be connected quickly, directly to the main board through direct connection.

### **A COMPLETE SOLUTION**

- Low consumption and great reliability, thanks to the Brushless motor.
- Very silent during movement.
- Perfectly reversible for manual opening.
- Different movement arms, available for doors to push or pull.
- Available in spring closing version.

### **INNOVATIVE ELECTRONIC CONTROL UNIT**

- Pre-configured board for standard installations, without the need to set additional parameters.
- Fully customizable configurations for specific installations.
- Parameters setting and monitoring through alphanumeric display.
- Board with dedicated connectors for each individual accessory.
- Obstacle detection.

# FLUO-SW LIGHT - HEAVY

FLUO-SW2

LIGHT

UP TO  
200 KG



FLUO-SW3

HEAVY

UP TO  
300 KG

Code	Description
------	-------------

**FLUO-SW2 - Automations for 1 swing leaf doors with motor-powered opening and closing**

**818SW-0010**

Automation for 1 swing leaf with motor-powered opening and closing.  
Standard profile length L = 443 mm.  
Leaf maximum weight up to 200 Kg.



NOTES:

818SW-0010 FOR INDOOR APPLICATIONS DOES NOT SUBJECT TO WIND GUSTS

**FLUO-SW3 - Automations for 1 swing leaf doors with motor-powered opening and closing**

**818SW-0020**

Single automation for 1 swing leaf with motor-driven opening and closing.  
Standard profile length L = 463 mm.  
Leaf maximum weight up to 300 Kg.



**818SW-0090**

Single automation for 1 swing leaf with motor-driven opening and closing.  
Maximum profile length cut to measure L = 1000 mm.  
Leaf maximum weight up to 300 Kg



**818SW-0100**

Single automation for 1 swing leaf with motor-driven opening and closing.  
Maximum profile length cut to measure L = 2000 mm.  
Leaf maximum weight up to 300 Kg



**818SW-0110**

Single automation for 1 swing leaf with motor-driven opening and closing.  
Maximum profile length cut to measure L = 3000 mm.  
Leaf maximum weight up to 300 Kg



**FLUO-SW3 - Automations for 2 swing leaves doors with motor-powered opening and closing**

**818SW-0120**

Single automation for 2 swing leaves with motor-driven opening and closing.  
Profile length cut to measure L Max. = 2000 mm.  
Leaf maximum weight up to 300 + 300 Kg.



**818SW-0130**

Single automation for 2 swing leaves with motor-driven opening and closing.  
Profile length cut to measure L Max. = 3000 mm.  
Leaf maximum weight up to 300 + 300 Kg.



TESTED ACCORDING TO EN 16005 STANDARDS DEVICE POWERED WITH VERY LOW VOLTAGE AUTOMATION WITH ENCODER



Code	Description
<b>Accessories</b>	
<b>818XC-0038</b>	Control board for operation during power outages and for recharging the batteries.
<b>Accessories</b>	
<b>818XA-0051</b>	Board for auxiliary contacts.
<b>818XA-0040</b>	Straight PULL arm.
<b>818XA-0041</b>	Hinged PUSH arm.
<b>818XA-0059</b>	Straight PUSH arm.
<b>818XC-0039</b>	Three-position mechanical function selector.
<b>818XA-0045</b>	17 mm spacer for FLUO-SW.
<b>818XA-0046</b>	34 mm spacer for FLUO-SW.
<b>818XA-0047</b>	51 mm spacer for FLUO-SW.
<b>818XA-0048</b>	68 mm spacer for FLUO-SW.
<b>818XA-0049</b>	85 mm spacer for FLUO-SW.
<b>Accessories for: 818XA-0040</b>	
<b>818XC-0040</b>	11 mm spacer for 818XA-0040.



DEVICE POWERED WITH VERY LOW VOLTAGE

# FLUO-SW SPRING

FLUO-SWS3

SPRING

UP TO  
300 KG



Code	Description
------	-------------

FLUO-SWS3 - Automations for single leaf swing doors with motor-driven opening and spring closing

**818SW-0140**

Automation for single leaf swing door with motor-driven opening and spring closing.  
Standard profile length L = 540 mm.  
Leaf maximum weight up to 300 Kg.



TESTED ACCORDING TO EN 16005 STANDARDS
 DEVICE POWERED WITH VERY LOW VOLTAGE
 AUTOMATION WITH ENCODER

**Code**      **Description**

Accessories

**818XC-0041**      Card for operation during emergency black outs and for recharging the batteries complete with aluminium box.



Accessories

**818XA-0069**      Straight PULL arm.

**818XA-0071**      Hinged PUSH arm.

**818XA-0070**      Straight PUSH arm.

**818XC-0039**      Three-position mechanical function selector.

**818XA-0072**      44 mm spacer for FLUO-SW3.


**818XA-0073**      79 mm spacer for FLUO-SW3.



DEVICE POWERED WITH VERY LOW VOLTAGE


# DIMENSIONS (mm)

## FLUO-SW2

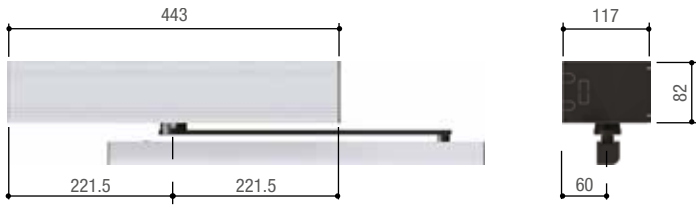


818SW-0010

## FLUO-SW3

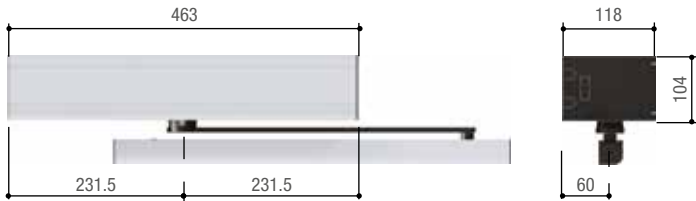

818SW-0020  
818SW-0090  
818SW-0100  
818SW-0110  
818SW-0120  
818SW-0130

## FLUO-SWS3

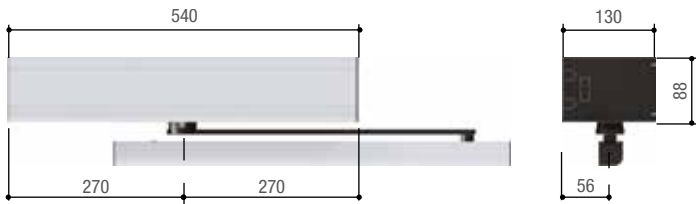


818SW-0140

# OPERATING LIMITS AND TECHNICAL CHARACTERISTICS


	LIGHT	HEAVY	SPRING
	FLUO-SW2	FLUO-SW3	FLUO-SWS3
Min./max. length of gate (mm)	800 / 1200	800 / 1500	800 / 1500
Leaf max./min. weight (Kg)	200 / 80	300 / 80	300 / 80
IP protection rating	20	20	20
Power supply (V - 50/60Hz)	100 - 240 AC	100 - 240 AC	100 - 240 AC
Motor power supply (V)	36 DC	36 DC	36 DC
Nominal power (W)	40	70	70
Stand by nominal power (W)	8	8	3
Maneuvering time 90° (s)	2 to 6	2 to 6	2 to 6
Intermittence/Duty-cycle (%)	CONTINUOUS SERVICES	CONTINUOUS SERVICES	CONTINUOUS SERVICES
Nominal load (N)	20	40	40
Operating temperature (°C)	-15 to +50	-15 to +50	-15 to +50

● 36 V DC


## FLUO-SW2 - LIGHT



## FLUO-SW3 - HEAVY



## FLUO-SWS3 - SPRING





## SUITABLE FOR ALL TYPES OF DOORS

FLUO-SW does not require a particular type of door to be installed, it is sufficient that the door is of good manufacture, made of wood, aluminium or plastic material. For the automation wall mounting it is essential to use suitable fastening systems based on the constructive nature of the support.

# AUTOMATIC SLIDING DOORS

**BASIC**

**STANDARD**

**TELESCOPIC**

**HEAVY**

**MAGNUM**

**CAME** 

[CAME.COM](https://www.came.com)



**EMERGENCY  
VERSIONS**

**FOR 1 LEAF**  
UP TO 100 KG

**FOR 2 LEAVES**  
UP TO 90 KG EACH

**FLUO-SLB**

**FLUO-SLBE**

**FOR 1 LEAF**  
UP TO 140 KG

**FOR 2 LEAVES**  
UP TO 120 KG EACH

**FLUO-SLS**

**FLUO-SLE**

**FOR 2 LEAVES**  
UP TO 100 KG EACH

**FOR 4 LEAVES**  
UP TO 70 KG EACH

**FLUO-SLT**

**FLUO-SLTE**

**FOR 1 LEAF**  
UP TO 180 KG

**FOR 2 LEAVES**  
UP TO 150 KG EACH

**FLUO-SLH**


**FOR 1 LEAF**  
UP TO 400 KG

**FOR 2 LEAVES**  
UP TO 250 KG EACH


**FLUO-SLM**

# SLIDING DOORS: STANDARD INSTALLATIONS


## 1 SLIDING LEAF + 1 FIXED LEAF OPENING TOWARDS THE RIGHT

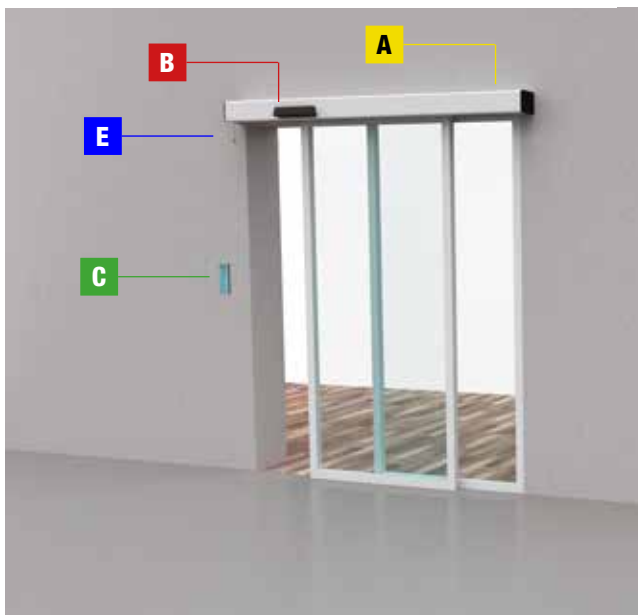

## 1 SLIDING LEAF + 1 FIXED LEAF OPENING TOWARDS THE LEFT

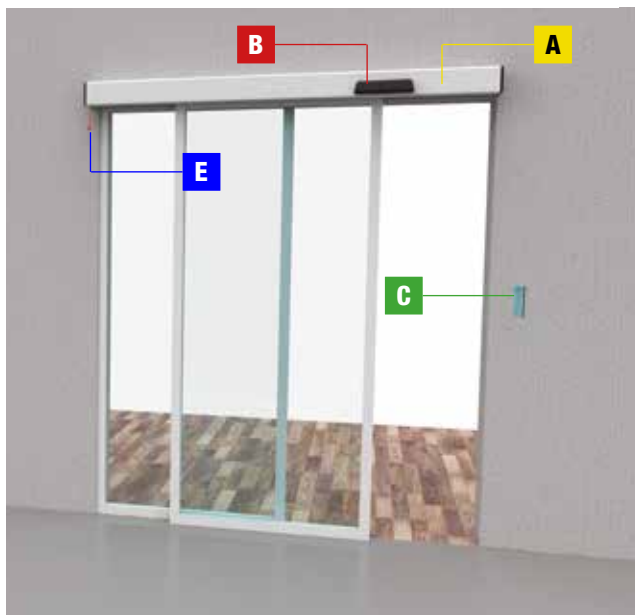

## 2 SLIDING LEAVES + 2 FIXED LEAVES

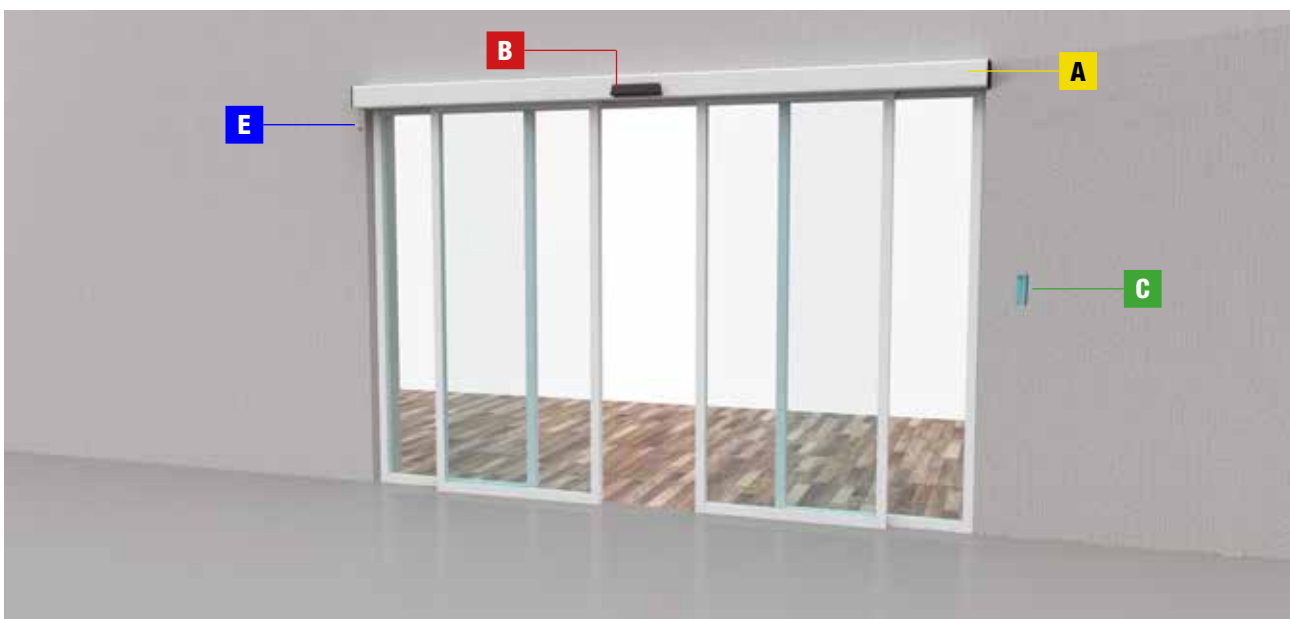

- A**
- Automation (control board-fitted operator)
  - Power outage emergency operation board
  - Control panel

- B**
- Indoor / outdoor sensor

- C**
- Functions selector


- E**
- Cord control for mechanical release

**NOTE**  
Fixed leaves are elements that are not always present and in any case they are not fundamental.




## TELESCOPIC DOORS: STANDARD INSTALLATIONS


### 2 TELESCOPIC LEAVES + 1 FIXED LEAF OPENING TOWARDS THE RIGHT

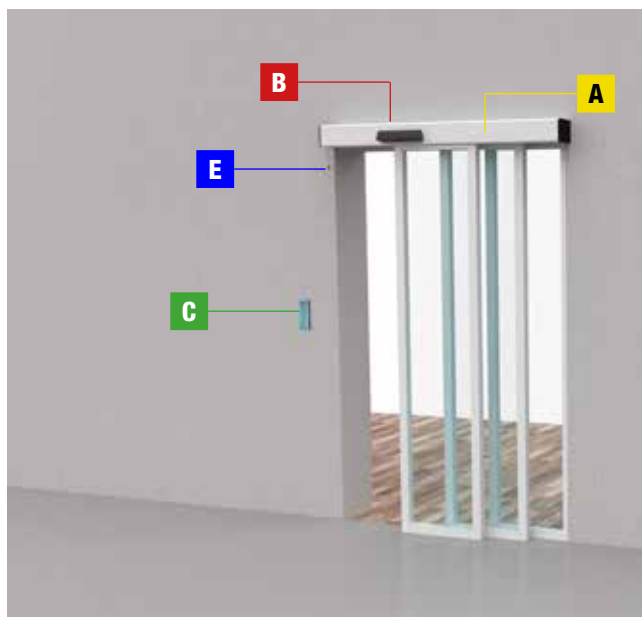

### 2 TELESCOPIC LEAVES + 1 FIXED LEAF OPENING TOWARDS THE LEFT

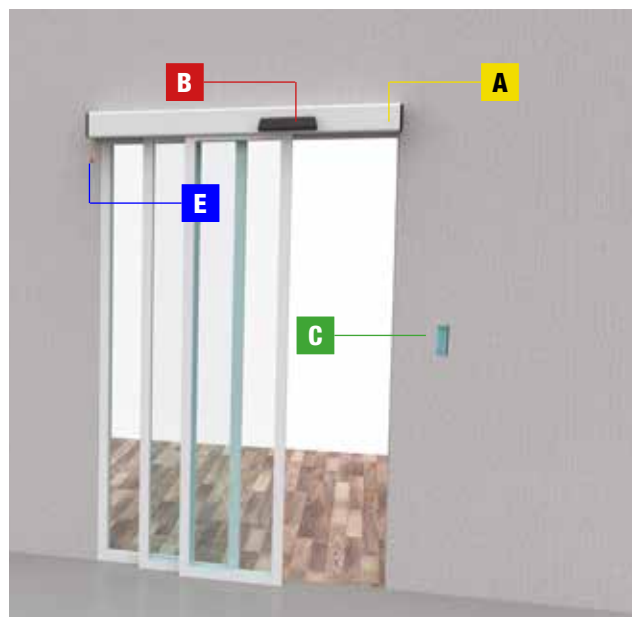

### 4 TELESCOPIC LEAVES

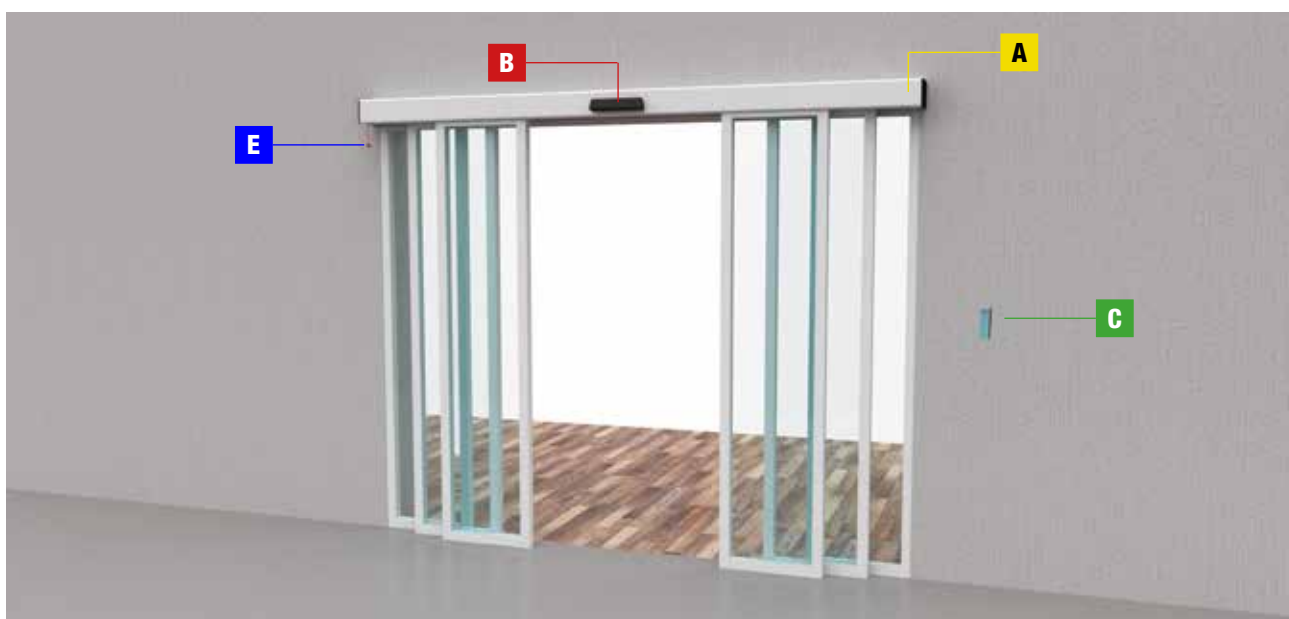

## CABLES FOR STANDARD INSTALLATION

CABLE LENGTH (m)	< 10	from 10 to 20	from 20 to 30
230V AC Power supply	3G x 1.5 mm <sup>2</sup>	3G x 1.5 mm <sup>2</sup>	3G x 2.5 mm <sup>2</sup>
818XA-0050 Features selector	UTP CAT 4 AWG24 - 4 x 0.5 mm <sup>2</sup> Bipolar twisted	UTP CAT 4 AWG24 - 4 x 0.5 mm <sup>2</sup> Bipolar twisted	UTP CAT 4 AWG24 - 4 x 0.5 mm <sup>2</sup> Bipolar twisted
12 - 24 V AC - DC touch sensors	4 x 1 mm <sup>2</sup>	4 x 1 mm <sup>2</sup>	4 x 1 mm <sup>2</sup>
Command and control devices	*N. x 0.5 mm <sup>2</sup>	*N. x 0.5 mm <sup>2</sup>	*N. x 0.5 mm <sup>2</sup>

\*N. = see product mounting instructions -

# BEAM DIMENSIONS


FLUO-SLB  
FLUO-SLBE  
FLUO-SLS  
FLUO-SLE  
FLUO-SLH  
FLUO-SLM

## BASIC STANDARD HEAVY MAGNUM

Ld = AUTOMATION LENGTH  
La = PASSAGE WIDTH  
Lm = LEAF WIDTH

Loo = LEAF OVERLAPPING OPEN SIDE  
(depends on the type of door/gate)  
Loc = LEAF OVERLAPPING CLOSE SIDE  
(depends on the type of door/gate)

### 1 SLIDING DOOR WITH RIGHT OR LEFT OPENING (mm)

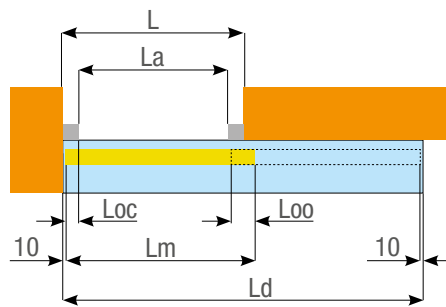


**$Ld = La + Lm + Loc + 20$  AUTOMATION LENGTH**

**$La = Lm - Loc - Loo$  PASSAGE WIDTH**

**$Lm = La + Loc + Loo$  LEAF WIDTH**

### 2 SLIDING LEAVES (mm)

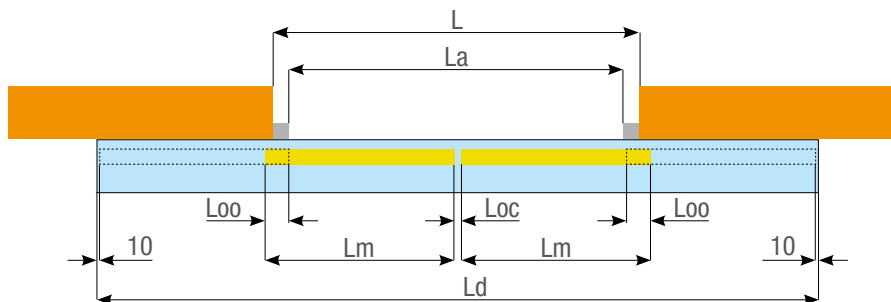

**$Ld = La + 2Lm + 20$  AUTOMATION LENGTH**

**$La = 2Lm - Loc - 2Loo$  PASSAGE WIDTH**


**$Lm = (La - Loc + 2Loo) / 2$  LEAF WIDTH**

FLUO-SLT  
FLUO-SLTE

# TELESCOPIC

- MASONRY
- MOVEMENT OVERALL DIMENSIONS
- AUTOMATION PROFILE
- MOVING LEAF/LEAVES

## 2 TELESCOPIC LEAFS WITH RIGHT OR LEFT OPENING (mm)

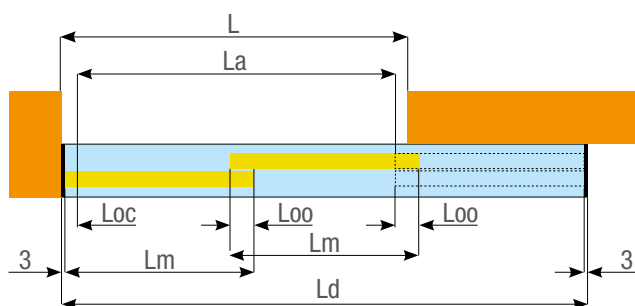


$$Ld = La + 2Lm + 6 \text{ AUTOMATION LENGTH}$$

$$La = 2Lm + Loc - 2Loo \text{ PASSAGE WIDTH}$$

$$Lm = (La - Loc + 2Loo) / 2 \text{ LEAF WIDTH}$$

## 4 TELESCOPIC LEAVES (mm)

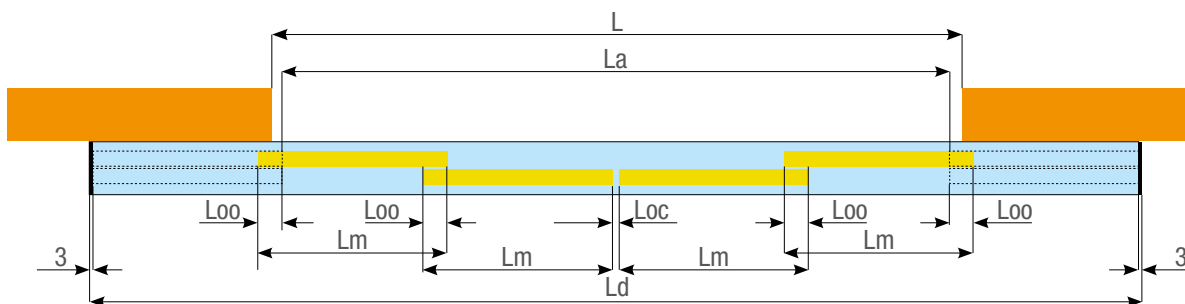

$$Ld = La + 2Lm + 6 \text{ AUTOMATION LENGTH}$$

$$La = 4Lm + Loc - 4Loo \text{ PASSAGE WIDTH}$$


$$Lm = (La - Loc + 4Loo) / 4 \text{ LEAF WIDTH}$$

# BEAM SECTION

FLUO-SLB  
FLUO-SLBE

## BASIC


Dimensions (mm)  
Scale 1 : 2

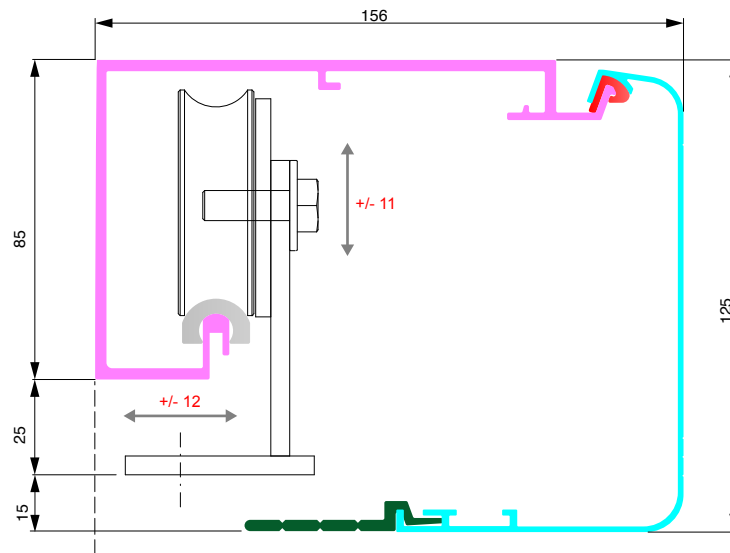

FLUO-SLS  
FLUO-SLE  
FLUO-SLH

## STANDARD HEAVY


Dimensions (mm)  
Scale 1 : 2

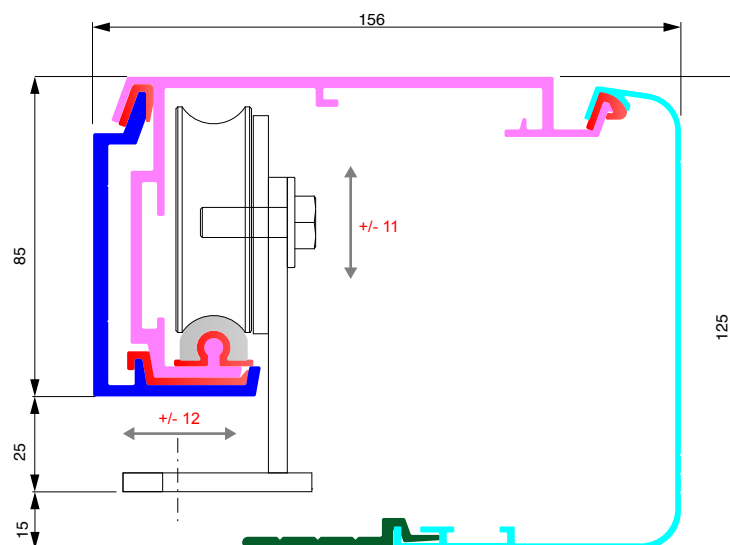

**FLUO-SLM**

**MAGNUM**


Dimensions (mm)  
Scale 1 : 2

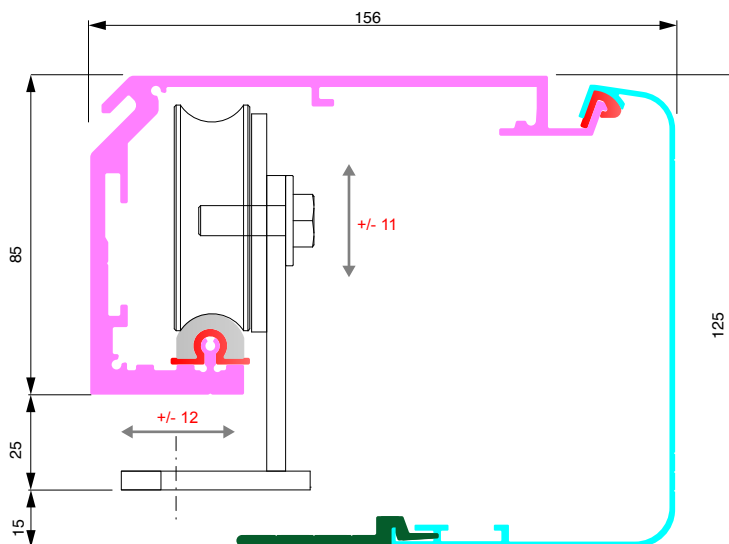

**FLUO-SLT  
FLUO-SLTE**

**TELESCOPIC**

Dimensions (mm)  
Scale 1 : 2

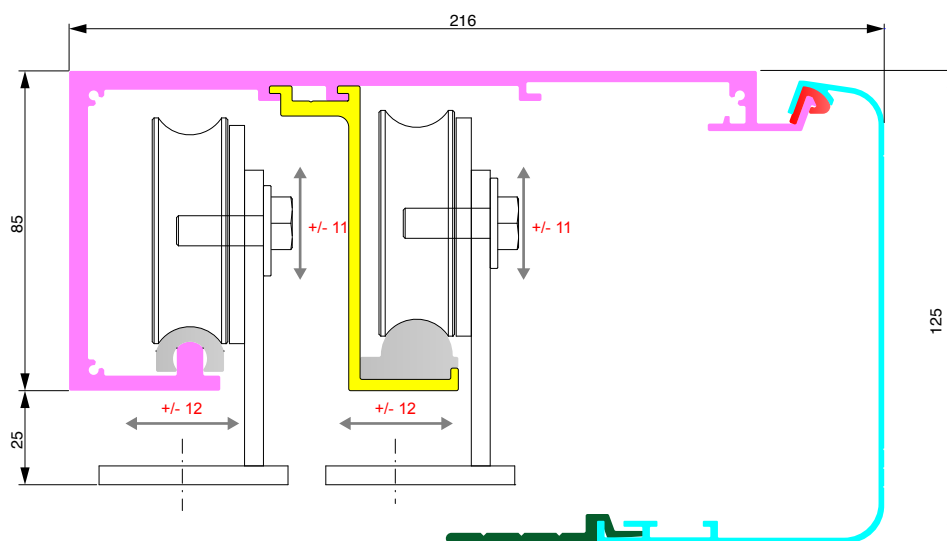

- BEAM PROFILE
- ANTI-VIBRATING PROFILES
- COVERING CARTER PROFILE
- CASING CLOSING GASKET
- BEAM COUPLING PROFILE
- SECOND LEAF CONNECTION PROFILE

# FLUO-SL

Extremely silent door thanks to the brushless DC motor.

Also available in the "EMERGENCY" version for special installations.

The European standard EN 16005, specifies the requirements for motor-powered pedestrian doors installed also in escape routes.

The great advantage of FLUO-SLE consists in being able to install, in emergency routes and exits, automations approved for this purpose, with standard sliding leaves, to replace the traditional automations with sliding push-to-open leaves, in the direction of emergency exit.



## A HIGH-TECH SYSTEM FOR LIMITED SPACES

### A COMPLETE SOLUTION

- Low consumption, thanks to the Brushless motor with direct drive technology.
- Very silent during movement.
- Power supply switching from 100 to 240 V 50/60 Hz.
- High performance with doors up to 400 Kg.
- Assembly kit available for quick installation.

### INNOVATIVE ELECTRONIC CONTROL UNIT

- Pre-configured board for standard installations, without the need to set additional parameters.
- Fully customizable configurations for specific installations.
- Parameters setting and monitoring through alphanumeric display.
- Backup system through Micro SD board.
- Board with dedicated connectors for each individual accessory.
- Obstacle detection.

### EMERGENCY EXITS

- EMERGENCY version available for emergency exits installation.
- Compatible with the 818XG-0016 sensor, this solution complies with international regulations for emergency exits and is TUV certified (check the national and local limits).

# FLUO-SL BASIC

FLUO-SLB  
FLUO-SLBE

1 LEAF UP TO  
100 KG

2 LEAVES UP TO  
90 KG EACH



## Code Description

### Complete automations with Brushless motor

**818SL-0050 / 59**

Complete automation for door with one moving leaf.



**818SL-0060 / 69**

Complete automation for door with two moving leaves.



### Complete automations with Brushless motor, EMERGENCY version

**818SL-0070 / 79**

Complete automation for door with one moving leaf, with EMERGENCY function.



**818SL-0080 / 89**

Complete automation for door with two moving leaves, with EMERGENCY function.



#### NOTES:

System completion accessories see page 48.

DEVICE POWERED WITH VERY LOW VOLTAGE AUTOMATION WITH ENCODER

## FLUO-SLB ASSEMBLED AUTOMATIONS

FLUO-SLB 1 LEAF	AUTOMATION LENGTH	PASSAGE WIDTH	LEAF WIDTH	FLUO-SLB 2 LEAVES	AUTOMATION LENGTH	PASSAGE WIDTH	LEAVES WIDTH
CODE	Ld (mm)	La (mm)	Lm (mm)	CODE	Ld (mm)	La (mm)	Lm (mm)
818SL-0050	2000	925	1015	818SL-0060	2000	940	2 x 520
818SL-0051	2200	1025	1115	818SL-0061	2200	1040	2 x 570
818SL-0052	2600	1225	1315	818SL-0062	2600	1240	2 x 670
818SL-0053	3000	1425	1515	818SL-0063	3000	1440	2 x 770
818SL-0054	3300	1575	1665	818SL-0064	3300	1590	2 x 845
818SL-0055	3600	1725	1815	818SL-0065	3600	1740	2 x 920
818SL-0056	4000	1925	2015	818SL-0066	4000	1940	2 x 1020
818SL-0057	4400	2125	2215	818SL-0067	4400	2140	2 x 1120
818SL-0058	5000	2425	2515	818SL-0068	5000	2440	2 x 1270
818SL-0059	6600	3225	3315	818SL-0069	6600	3240	2 x 1670

The values shown are calculated considering Loo = 50 mm and Loc = 40 mm)

The values shown are calculated considering Loo = 50 mm and Loc = 0 mm)

## FLUO-SLBE ASSEMBLED AUTOMATIONS WITH EMERGENCY FUNCTION

FLUO-SLBE 1 LEAF	AUTOMATION LENGTH	PASSAGE WIDTH	LEAF WIDTH	FLUO-SLBE 2 LEAVES	AUTOMATION LENGTH	PASSAGE WIDTH	LEAVES WIDTH
CODE	Ld (mm)	La (mm)	Lm (mm)	CODE	Ld (mm)	La (mm)	Lm (mm)
818SL-0070	2000	925	1015	818SL-0080	2000	940	2 x 520
818SL-0071	2200	1025	1115	818SL-0081	2200	1040	2 x 570
818SL-0072	2600	1225	1315	818SL-0082	2600	1240	2 x 670
818SL-0073	3000	1425	1515	818SL-0083	3000	1440	2 x 770
818SL-0074	3300	1575	1665	818SL-0084	3300	1590	2 x 845
818SL-0075	3600	1725	1815	818SL-0085	3600	1740	2 x 920
818SL-0076	4000	1925	2015	818SL-0086	4000	1940	2 x 1020
818SL-0077	4400	2125	2215	818SL-0087	4400	2140	2 x 1120
818SL-0078	5000	2425	2515	818SL-0088	5000	2440	2 x 1270
818SL-0079	6600	3225	3315	818SL-0089	6600	3240	2 x 1670

The values shown are calculated considering Loo = 50 mm and Loc = 40 mm)

The values shown are calculated considering Loo = 50 mm and Loc = 0 mm)

#### NOTES:

In EMERGENCY automation applications always consider the appropriate choice of control and safety devices (SEE TECHNICAL MANUAL)



## Kit for assembling BASIC • FLUO-SLB sliding doors

**8K18SL-003**

FLUO-SLB complete automation kit for doors with one moving leaf.  
Includes: operator, control electronics, return pulley, 2 beam profile end caps and 2 carriages for a leaf.

## Kit for assembling BASIC • FLUO- SLBE sliding doors EMERGENCY version

**8K18SL-004**

FLUO-SLBE complete automation kit for doors with one moving leaf.  
Includes: operator, control electronics, return pulley, 2 beam profile end caps and 2 carriages for a leaf.

## Accessory for assembling BASIC sliding doors

**818XA-0030**

Second leaf automation kit for FLUO-SLB and FLUO-SLE doors.  
Includes: 2 carriages for the second leaf.



DEVICE POWERED WITH VERY LOW VOLTAGE  AUTOMATION WITH ENCODER

## NOTES:

System completion accessories see page 66.



The European standard EN 16005, specifies the requirements for motor-powered pedestrian doors installed also in escape routes. The great advantage of FLUO EMERGENCY consists in being able to install, in emergency routes and exits, automations approved for this purpose, with standard sliding leaves, to replace the traditional automations with sliding push-to-open leaves, in the direction of emergency exit.

## OPERATING LIMITS AND TECHNICAL CHARACTERISTICS

	BASIC				EMERGENCY			
	FLUO-SLB		FLUO-SLB		FLUO-SLBE		FLUO-SLBE	
	1 LEAF		2 LEAVES		1 LEAF		2 LEAVES	
Min./max. length of gate (mm)	1015	3015	520	1670	1015	3015	520	1670
Max leaf weight (kg)	100		90 + 90		100		90 + 90	
Certification	TÜV Thüringen		TÜV Thüringen		TÜV Thüringen		TÜV Thüringen	
IP protection rating	20		20		20		20	
Power supply (V - 50/60Hz)	100 - 240 AC		100 - 240 AC		100 - 240 AC		100 - 240 AC	
Nominal power (W)	70		70		70		70	
Stand by nominal power (W)	10		10		10		10	
Maximum operating speed (m/s)	0.8		1.6		0.8		1.6	
Intermittence/Duty-cycle (%)	CONTINUOUS OPERATION		CONTINUOUS OPERATION		CONTINUOUS OPERATION		CONTINUOUS OPERATION	
Nominal load (N)	150		150		150		150	
Operating temperature (°C)	-15 to +50		-15 to +50		-15 to +50		-15 to +50	

● 42 V DC

# FLUO-SL STANDARD

FLUO-SLS  
FLUO-SLE

1 LEAF UP TO  
140 KG

2 LEAVES UP TO  
120 KG EACH



## Code Description

### Complete automations with Brushless motor

**818SL-0020 / 29**

Complete automation for door with one moving leaf.



**818SL-0040 / 49**

Complete automation for door with two moving leaves.



### Complete automations with Brushless motor, EMERGENCY version

**818SL-0010 / 19**

Complete automation for door with one moving leaf, with EMERGENCY function.



**818SL-0030 / 39**

Complete automation for door with two moving leaves, with EMERGENCY function.



#### NOTES:

System completion accessories see page 48.

DEVICE POWERED WITH VERY LOW VOLTAGE AUTOMATION WITH ENCODER

## FLUO-SLS ASSEMBLED AUTOMATIONS

FLUO-SLS 1 LEAF	AUTOMATION LENGTH	PASSAGE WIDTH	LEAF WIDTH	FLUO-SLS 2 LEAVES	AUTOMATION LENGTH	PASSAGE WIDTH	LEAVES WIDTH
CODE	Ld (mm)	La (mm)	Lm (mm)	CODE	Ld (mm)	La (mm)	Lm (mm)
818SL-0020	2000	925	1015	818SL-0040	2000	940	2 x 520
818SL-0021	2200	1025	1115	818SL-0041	2200	1040	2 x 570
818SL-0022	2600	1225	1315	818SL-0042	2600	1240	2 x 670
818SL-0023	3000	1425	1515	818SL-0043	3000	1440	2 x 770
818SL-0024	3300	1575	1665	818SL-0044	3300	1590	2 x 845
818SL-0025	3600	1725	1815	818SL-0045	3600	1740	2 x 920
818SL-0026	4000	1925	2015	818SL-0046	4000	1940	2 x 1020
818SL-0027	4400	2125	2215	818SL-0047	4400	2140	2 x 1120
818SL-0028	5000	2425	2515	818SL-0048	5000	2440	2 x 1270
818SL-0029	6600	3225	3315	818SL-0049	6600	3240	2 x 1670

The values shown are calculated considering Loo = 50 mm and Loc = 40 mm)

The values shown are calculated considering Loo = 50 mm and Loc = 0 mm)

## FLUO-SLSE ASSEMBLED AUTOMATIONS WITH EMERGENCY FUNCTION

FLUO-SLE 1 LEAF	AUTOMATION LENGTH	PASSAGE WIDTH	LEAF WIDTH	FLUO-SLE 2 LEAVES	AUTOMATION LENGTH	PASSAGE WIDTH	LEAVES WIDTH
CODE	Ld (mm)	La (mm)	Lm (mm)	CODE	Ld (mm)	La (mm)	Lm (mm)
818SL-0010	2000	925	1015	818SL-0030	2000	940	2 x 520
818SL-0011	2200	1025	1115	818SL-0031	2200	1040	2 x 570
818SL-0012	2600	1225	1315	818SL-0032	2600	1240	2 x 670
818SL-0013	3000	1425	1515	818SL-0033	3000	1440	2 x 770
818SL-0014	3300	1575	1665	818SL-0034	3300	1590	2 x 845
818SL-0015	3600	1725	1815	818SL-0035	3600	1740	2 x 920
818SL-0016	4000	1925	2015	818SL-0036	4000	1940	2 x 1020
818SL-0017	4400	2125	2215	818SL-0037	4400	2140	2 x 1120
818SL-0018	5000	2425	2515	818SL-0038	5000	2440	2 x 1270
818SL-0019	6600	3225	3315	818SL-0039	6600	3240	2 x 1670

The values shown are calculated considering Loo = 50 mm and Loc = 40 mm)

The values shown are calculated considering Loo = 50 mm and Loc = 0 mm)

#### NOTES:

In EMERGENCY automation applications always consider the appropriate choice of control and safety devices (SEE TECHNICAL MANUAL)

## Kit for assembling STANDARD • FLUO-SLS sliding doors

**8K18SL-001**

FLUO-SLS complete automation kit for doors with one moving leaf.  
Includes: operator, control electronics, return pulley, 2 beam profile end caps and 2 carriages for a leaf.

## Kit for assembling STANDARD • FLUO-SLE sliding doors EMERGENCY version

**8K18SL-002**

FLUO-SLE complete automation kit for doors with one moving leaf.  
Includes: operator, control electronics, return pulley, 2 beam profile end caps and 2 carriages for a leaf.

## Accessory for assembling STANDARD sliding doors

**818XA-0024**

Second leaf automation kit for FLUO-SLS and FLUO-SLE doors.  
Includes: 2 carriages for the second leaf.

 DEVICE POWERED WITH VERY LOW VOLTAGE  AUTOMATION WITH ENCODER

## NOTES:

System completion accessories see page 66.



The European standard EN 16005, specifies the requirements for motor-powered pedestrian doors installed also in escape routes. The great advantage of FLUO EMERGENCY consists in being able to install, in emergency routes and exits, automations approved for this purpose, with standard sliding leaves, to replace the traditional automations with sliding push-to-open leaves, in the direction of emergency exit.

## OPERATING LIMITS AND TECHNICAL CHARACTERISTICS

	STANDARD				EMERGENCY			
	FLUO-SLS		FLUO-SLS		FLUO-SLE		FLUO-SLE	
	1 LEAF	3315	2 LEAVES	1670	1 LEAF	3315	2 LEAVES	1670
<b>Min./max. length of gate (mm)</b>	<b>1015</b>	<b>3315</b>	<b>520</b>	<b>1670</b>	<b>1015</b>	<b>3315</b>	<b>520</b>	<b>1670</b>
<b>Max leaf weight (kg)</b>	<b>100</b>		<b>90 + 90</b>		<b>100</b>		<b>90 + 90</b>	
Certification	TÜV Thüringen		TÜV Thüringen		TÜV Thüringen		TÜV Thüringen	
IP protection rating	20		20		20		20	
Power supply (V - 50/60Hz)	100 - 240 AC		100 - 240 AC		100 - 240 AC		100 - 240 AC	
Nominal power (W)	70		70		70		70	
Stand by nominal power (W)	10		10		10		10	
Maximum operating speed (m/s)	<b>0.8</b>		<b>1.6</b>		<b>0.8</b>		<b>1.6</b>	
Intermittence/Duty-cycle (%)	CONTINUOUS OPERATION		CONTINUOUS OPERATION		CONTINUOUS OPERATION		CONTINUOUS OPERATION	
Nominal load (N)	150		150		150		150	
Operating temperature (°C)	-15 to +50		-15 to +50		-15 to +50		-15 to +50	

● 42 V DC

# FLUO-SL HEAVY

FLUO-SLH

1 LEAF UP TO  
180 KG

2 LEAVES UP TO  
150 KG EACH



## Code Description

### Complete automations with Brushless motor

**818SL-0090 / 98** Complete automation for door with one moving leaf.



**818SL-0101 / 109** Complete automation for door with two moving leaves.



#### NOTES:

System completion accessories see page 48.

DEVICE POWERED WITH VERY LOW VOLTAGE AUTOMATION WITH ENCODER

## FLUO-SLH ASSEMBLED AUTOMATIONS

FLUO-SLH 1 LEAF				FLUO-SLH 2 LEAVES			
CODE	AUTOMATION LENGTH	PASSAGE WIDTH	LEAF WIDTH	CODE	AUTOMATION LENGTH	PASSAGE WIDTH	LEAVES WIDTH
	Ld (mm)	La (mm)	Lm (mm)		Ld (mm)	La (mm)	Lm (mm)
818SL-0090	2000	925	1015	818SL-0101	2200	1040	2 x 570
818SL-0091	2200	1025	1115	818SL-0102	2600	1240	2 x 670
818SL-0092	2600	1225	1315	818SL-0103	3000	1440	2 x 770
818SL-0093	3000	1425	1515	818SL-0104	3300	1590	2 x 845
818SL-0094	3300	1575	1665	818SL-0105	3600	1740	2 x 920
818SL-0095	3600	1725	1815	818SL-0106	4000	1940	2 x 1020
818SL-0096	4000	1925	2015	818SL-0107	4400	2140	2 x 1120
818SL-0097	4400	2125	2215	818SL-0108	5000	2440	2 x 1270
818SL-0098	5000	2425	2515	818SL-0109	6600	3240	2 x 1670

The values shown are calculated considering Loo = 50 mm and Loc = 40 mm)

The values shown are calculated considering Loo = 50 mm and Loc = 0 mm)

## Kit for assembling HEAVY • FLUO-SLH sliding doors

**8K18SL-006**

FLUO-SLH complete automation kit for doors with one moving leaf.  
Includes: operator, control electronics, return pulley, 2 beam profile end caps and 2 carriages for a leaf.

## Accessory for assembling MAGNUM • HEAVY sliding doors

**818XA-0060**

Second leaf automation kit for FLUO-SLH and FLUO-SLM doors.  
Includes: 2 carriages for the second leaf.



DEVICE POWERED WITH VERY LOW VOLTAGE



AUTOMATION WITH ENCODER

## NOTES:

System completion accessories see page 66.



FLUO-SL HEAVY automations are ideal for applications on medium and large doors/leaves, for intensive use such as in supermarkets, shopping malls, public offices.

## OPERATING LIMITS AND TECHNICAL CHARACTERISTICS

	HEAVY			
	FLUO-SLH 1 LEAF		FLUO-SLH 2 LEAVES	
Min./max. length of gate (mm)	1015	3315	520	1670
Max leaf weight (kg)	180		150 + 150	
IP protection rating	20		20	
Power supply (V - 50/60Hz)	100 - 240 AC		100 - 240 AC	
Nominal power (W)	70		70	
Stand by nominal power (W)	10		10	
Maximum operating speed (m/s)	0.6		1.2	
Intermittence/Duty-cycle (%)	CONTINUOUS OPERATION		CONTINUOUS OPERATION	
Nominal load (N)	150		150	
Operating temperature (°C)	-15 to +50		-15 to +50	

● 42 V DC

# FLUO-SLM MAGNUM

FLUO-SLM

1 LEAF UP TO 400  
KG

2 LEAVES UP TO  
250 KG EACH



## Code Description

### Complete automations with Brushless motor

**818SL-0130 / 139** Complete automation for door with one moving leaf.



**818SL-0140 / 147** Complete automation for door with two moving leaves.



#### NOTES:

System completion accessories see page 48.

DEVICE POWERED WITH VERY LOW VOLTAGE AUTOMATION WITH ENCODER

## FLUO-SLM ASSEMBLED AUTOMATIONS

FLUO-SLM 1 LEAF				FLUO-SLM 2 LEAVES			
CODE	AUTOMATION LENGTH	PASSAGE WIDTH	LEAF WIDTH	CODE	AUTOMATION LENGTH	PASSAGE WIDTH	LEAVES WIDTH
	Ld (mm)	La (mm)	Lm (mm)		Ld (mm)	La (mm)	Lm (mm)
818SL-0130	2000	925	1015				
818SL-0131	2200	1025	1115				
818SL-0132	2600	1225	1315	818SL-0140	2600	1240	2 x 670
818SL-0133	3000	1425	1515	818SL-0141	3000	1440	2 x 770
818SL-0134	3300	1575	1665	818SL-0142	3300	1590	2 x 845
818SL-0135	3600	1725	1815	818SL-0143	3600	1740	2 x 920
818SL-0136	4000	1925	2015	818SL-0144	4000	1940	2 x 1020
818SL-0137	4400	2125	2215	818SL-0145	4400	2140	2 x 1120
818SL-0138	5000	2425	2515	818SL-0146	5000	2440	2 x 1270
818SL-0139	6600	3225	3315	818SL-0147	6600	3240	2 x 1670

The values shown are calculated considering Loo = 50 mm and Loc = 40 mm)

The values shown are calculated considering Loo = 50 mm and Loc = 0 mm)

**Kit for assembling MAGNUM • FLUO-SLM sliding doors**

**8K18SL-007**                      FLUO-SLM complete automation kit for doors with one moving leaf.  
Includes: operator, control electronics, return pulley, 2 beam profile end caps and 2 carriages for a leaf.

**Accessory for assembling MAGNUM • HEAVY sliding doors**

**818XA-0060**                      Second leaf automation kit for FLUO-SLH and FLUO-SLM doors.  
Includes: 2 carriages for the second leaf.

**DEVICE POWERED WITH VERY LOW VOLTAGE**    **AUTOMATION WITH ENCODER**



FLUO-SL MAGNUM automations are specifically designed for applications on heavy and large doors/leafs. It is typically used in combination with armoured doors, with shatter-proof glass as those in bank branches.

**OPERATING LIMITS AND TECHNICAL CHARACTERISTICS**

	MAGNUM			
	FLUO-SLM 1 LEAF		FLUO-SLM 2 LEAVES	
<b>Min./max. length of gate (mm)</b>	<b>1015</b>	<b>3315</b>	<b>670</b>	<b>1670</b>
<b>Max leaf weight (kg)</b>	<b>400</b>		<b>250 + 250</b>	
IP protection rating	20		20	
Power supply (V - 50/60Hz)	100 - 240 AC		100 - 240 AC	
Nominal power (W)	70		70	
Stand by nominal power (W)	10		10	
Maximum operating speed (m/s)	<b>0.3</b>		<b>0.6</b>	
Intermittence/Duty-cycle (%)	CONTINUOUS OPERATION		CONTINUOUS OPERATION	
Nominal load (N)	150		150	
Operating temperature (°C)	-15 to +50		-15 to +50	

● 42 V DC

# FLUO-SLT TELESCOPIC

FLUO-SLT  
FLUO-SLTE

2 LEAVES UP TO  
100 KG EACH

4 LEAVES UP TO  
70 KG EACH



## Code Description

### Complete automations with Brushless motor

**818ST-0010 / 20** Complete automation for door with one moving leaf.



**818ST-0021 / 27** Complete automation for door with two moving leaves.



### Complete automations with Brushless motor and EMERGENCY function

**818ST-0030 / 40** Complete automation for door with one moving leaf, with EMERGENCY function.



**818ST-0041 / 47** Complete automation for door with two moving leaves, with EMERGENCY function.



#### NOTES:

System completion accessories see page 48.

DEVICE POWERED WITH VERY LOW VOLTAGE AUTOMATION WITH ENCODER

## FLUO-SLT ASSEMBLED AUTOMATIONS

FLUO-SLT 2 LEAVES				FLUO-SLT 4 LEAVES			
CODE	AUTOMATION LENGTH Ld (mm)	PASSAGE WIDTH La (mm)	LEAF WIDTH Lm (mm)	CODE	AUTOMATION LENGTH Ld (mm)	PASSAGE WIDTH La (mm)	LEAVES WIDTH Lm (mm)
818ST-0010	1800	1122	2 x 631				
818ST-0011	2000	1256	2 x 698				
818ST-0012	2200	1389	2 x 764				
818ST-0013	2600	1656	2 x 898				
818ST-0014	3000	1922	2 x 1031	818ST-0021	3000	1929	4 x 532
818ST-0015	3300	2122	2 x 1131	818ST-0022	3300	2129	4 x 582
818ST-0016	3600	2322	2 x 1231	818ST-0023	3600	2329	4 x 632
818ST-0017	4000	2589	2 x 1364	818ST-0024	4000	2596	4 x 699
818ST-0018	4400	2856	2 x 1498	818ST-0025	4400	2896	4 x 765
818ST-0019	5000	3256	2 x 1698	818ST-0026	5000	3262	4 x 865
818ST-0020	6600	4322	2 x 2231	818ST-0027	6600	4329	4 x 1132

The values shown are calculated considering Loo = 50 mm and Loc = 40 mm)

The values shown are calculated considering Loo = 50 mm and Loc = 0 mm)

## FLUO-SLTE ASSEMBLED AUTOMATIONS WITH EMERGENCY FUNCTION

FLUO-SLTE 2 LEAVES				FLUO-SLTE 4 LEAVES			
CODE	AUTOMATION LENGTH Ld (mm)	PASSAGE WIDTH La (mm)	LEAF WIDTH Lm (mm)	CODE	AUTOMATION LENGTH Ld (mm)	PASSAGE WIDTH La (mm)	LEAVES WIDTH Lm (mm)
818ST-0030	1800	1122	2 x 631				
818ST-0031	2000	1256	2 x 698				
818ST-0032	2200	1389	2 x 764				
818ST-0033	2600	1656	2 x 898				
818ST-0034	3000	1922	2 x 1031	818ST-0041	3000	1929	4 x 532
818ST-0035	3300	2122	2 x 1131	818ST-0042	3300	2129	4 x 582
818ST-0036	3600	2322	2 x 1231	818ST-0043	3600	2329	4 x 632
818ST-0037	4000	2589	2 x 1364	818ST-0044	4000	2596	4 x 699
818ST-0038	4400	2856	2 x 1498	818ST-0045	4400	2896	4 x 765
818ST-0039	5000	3256	2 x 1698	818ST-0046	5000	3262	4 x 865
818ST-0040	6600	4322	2 x 2231	818ST-0047	6600	4329	4 x 1132

The values shown are calculated considering Loo = 50 mm and Loc = 40 mm)

The values shown are calculated considering Loo = 50 mm and Loc = 0 mm)

#### NOTES:

In EMERGENCY automation applications always consider the appropriate choice of control and safety devices (SEE TECHNICAL MANUAL)



## Kit for assembling TELESCOPIC • FLUO-SLT sliding doors

**8K18ST-001**

FLUO-SLT complete automation kit for doors with 2 moving leaves.  
Includes: operator, control electronics, return pulley, 2 beam profile end caps and 4 carriages.

## Kit for assembling TELESCOPIC • FLUO- SLTE sliding doors EMERGENCY version

**8K18ST-002**

FLUO-SLTE complete automation kit for doors with 2 moving leaves.  
Includes: operator, control electronics, return pulley, 2 beam profile end caps and 4 carriages.

## Accessory for assembling TELESCOPIC sliding doors

**818XA-0033**

Second leaf automation kit for FLUO-SLT and FLUO-SLTE doors.  
Includes: 4 carriages.



DEVICE POWERED WITH VERY LOW VOLTAGE



AUTOMATION WITH ENCODER



FLUO-SL TELESCOPIC automations solve the problem of limited space. In fact, with telescopic doors/windows it is possible to obtain the maximum passage width.

## OPERATING LIMITS AND TECHNICAL CHARACTERISTICS

	TELESCOPIC				EMERGENCY			
	FLUO-SLT		FLUO-SLT		FLUO-SLTE		FLUO-SLTE	
	2 LEAVES		4 LEAVES		2 LEAVES		4 LEAVES	
<b>Min./max. length of gate (mm)</b>	<b>631</b>	<b>2231</b>	<b>532</b>	<b>1132</b>	<b>631</b>	<b>2231</b>	<b>520</b>	<b>1520</b>
<b>Max leaf weight (kg)</b>	<b>100 + 100</b>		<b>70 + 70 + 70 + 70</b>		<b>100 + 100</b>		<b>70 + 70 + 70 + 70</b>	
Certification	TÜV Thüringen		TÜV Thüringen		TÜV Thüringen		TÜV Thüringen	
IP protection rating	20		20		20			
Power supply (V - 50/60Hz)	100 - 240 AC		100 - 240 AC		100 - 240 AC		100 - 240 AC	
Nominal power (W)	70		70		70		70	
Stand by nominal power (W)	10		10		10		10	
Maximum operating speed (m/s)	<b>0.8</b>		<b>1.6</b>		<b>0.8</b>		<b>1.6</b>	
Intermittence/Duty-cycle (%)	CONTINUOUS OPERATION		CONTINUOUS OPERATION		CONTINUOUS OPERATION		CONTINUOUS OPERATION	
Nominal load (N)	150		150		150		150	
Operating temperature (°C)	-15 to +50		-15 to +50		-15 to +50		-15 to +50	

● 42 V DC

# ACCESSORIES FOR AUTOMATIC DOORS

**CAME** 

[CAME.COM](http://CAME.COM)



**Metro**  
**Subway**  
**Metro**



# ACCESSORIES

## SLIDING AUTOMATIONS COMPLETION

### Accessories for completing the sliding doors (ALL SERIES)

**818XC-0015**



Leaf position alert device

**818XC-0016**



Casing fastening device.

**818XC-0017**



Sensor fastening device.

**818XC-0014**



Built-in lever release kit.

**818XC-0037**



Support for SMALL opening and safety sensors.

### Accessories for completing the sliding doors (ALL SERIES)

**818XC-0012**



Bistable electric lock complete with cord and release lever.

**818XC-0029**



Lock device on the return

**818XC-0035**



Lock device on the winder (assembled inside the automation).

### Accessories for: 818XC-0012

**818XC-0013**



Electric lock position alert kit

### Accessories for SLIDING AUTOMATIONS

**818XA-0051**



Board for auxiliary contact.

### Power outage emergency operation boards

**818XC-0010**



Board for operating during power outages and for recharging the batteries, complete with brace and No. 1 12 V - 2 Ah battery.

**818XC-0011**



Board for operating during power outages and for recharging the batteries, complete with brace and No. 1 12 V - 5.4 Ah battery.







DEVICE POWERED WITH VERY LOW VOLTAGE



# ACCESSORIES

## PROFILES FOR SLIDING AUTOMATIONS IN KIT






### Profiles and gaskets for completing the ALL SERIES sliding doors

<b>818XA-0018</b>	<b>818XA-0019</b>	<b>818XA-0053</b>	<b>818XA-0014</b>
			
Casing gasket, 40 m. reel.	Casing lower gasket, 40 m. reel.	Rough casing profile, length 6620 mm.	Anodized casing profile, length 6620 mm.

### Profiles for completing the BASIC sliding doors

<b>818XA-0032</b>	<b>* 818XA-0023</b>
	
Rough box profile, length 6620 mm.	Anodized rail-frame, length 6620 mm.

### Profiles for completing the STANDARD- HEAVY sliding doors

<b>818XA-0012</b>	<b>818XA-0017</b>	<b>818XA-0021</b>	<b>818XA-0016</b>	<b>818XA-0015</b>
				
Anodized front profile, length 6620 mm.	Gasket for front profile, 40 m. reel	Anodized rear profile, length 6620 mm.	Gasket for rear profile, 40 m. reel	Gasket for guide, 40 m. reel.

### 818XA-0023


Anodized rail-frame, length 6620 mm.

NOTES:  
 For items:  
 818XA-0014 - 818XA-0032 - 818XA-0023 - 818XA-0012 - 818XA-0021 - 818XA-0061 - 818XA-0034 - 818XA-0035  
 the minimum quantity that can be ordered is 2 pieces.

# ACCESSORIES

## PROFILES FOR SLIDING AUTOMATIONS IN KIT

### Profiles for completing the MAGNUM sliding doors

**818XA-0061**



Anodized front profile, length 6620 mm.

**818XA-0015**



Gasket for guide, 40 m. reel.

**818XA-0023**



Anodized rail-frame, length 6620 mm.

### Profiles for completing the TELESCOPIC sliding doors

**818XA-0034**



Rough box profile, length 6620 mm.

**818XA-0023**



Anodized rail-frame, length 6620 mm.

**818XA-0035**



Anodized rail-frame, length 6620 mm.

### Transmission belt

**818XA-0010**



Transmission belt, 50 m reel



### ANTI-PANIC PUSH-TO-OPEN SYSTEM

The European standard EN 16005, specifies the requirements for motor-powered pedestrian doors installed also in escape routes. When the installation of the FLUO EMERGENCY versions is not provided, it is possible to install the traditional automations with sliding push-to-open leaves, in the direction of emergency exit.

# ACCESSORIES

## CONTROL AND SAFETY

### Selectors and accessories

#### 818XA-0074



Selector with capacitive touch screen and integrated MiFare transponder module.

#### 818XA-0075



Basic model selector with numeric keypad.

### Microwave OPENING radar

#### 818XG-0047



MR8106N Volumetric unidirectional - bidirectional microwave radar  
12 - 24 V AC - DC.  
- Maximum application height 4 m  
- Detection area:  
LARGE field depth = 2 m and field width 4 m  
NARROW field depth = 2.5 m and field width 2 m  
- Adjustment with 818XG-0019 remote control.

### Microwave OPENING radar accessories

#### 818XG-0019



MRT001 Remote control for microwave volumetric radar.

### Touch-sensitive sensors

#### 806SL-0260



SELS2SDG Recess-mounted 12 - 24 V AC - DC touch sensor, with adjustable backlight.

### Accessories for touch-sensitive sensors

#### 806SL-0270



Surface-mounted casing.



DEVICE POWERED WITH VERY LOW VOLTAGE



Active infrared OPENING and SECURITY radar

**818XG-0014**



MR8003 12 - 24 V AC- DC adjustable-field radar.  
 - Maximum application height 3 m  
 - Detection area: field depth = 0.41 - 1.77 m, field width 3.1 m.

Dual technology OPENING and SAFETY radar tested according to EN 16005 standards

**818XG-0015**



MR8204 Opening and safety radar 12 - 30 V DC - 5% + 10%.  
 - Application height: 1,8 ÷ 3 m.  
 - Adjustable detection area.

OPENING and SAFETY radar for EMERGENCY automations tested according to EN 16005 standards

**818XG-0016**



MR8700 Control and safety radar 12 - 24 V AC - DC.  
 (To be installed exclusively in the exit direction).  
 - Application height: 2 ÷ 3.5 m  
 - Adjustable detection area

Active infrared OPENING and SAFETY radar tested according to EN 16005 standards

**818XG-0011**



MR8534 Safety radar for automatic swing doors \*L = 340 mm with backdrop suppression 12 - 24 V AC ± 10% / 12 - 30 V DC - 5% + 10%.  
 - Application height: 1,3 ÷ 3.5 m.  
 - Adjustable detection area.

**818XG-0012**



MR8570 Safety radar for automatic swing doors \*L = 700 mm with backdrop suppression 12 - 24 V AC ± 10% / 12 - 30 V DC - 5% + 10%.  
 - Application height: 1,3 ÷ 3.5 m.  
 - Adjustable detection area.

**818XG-0013**



MR8590 Safety radar for automatic swing doors \*L = 900 mm with backdrop suppression 12 - 24 V AC ± 10% / 12 - 30 V DC - 5% + 10%.  
 - Application height: 1,3 ÷ 3.5 m.  
 - Adjustable detection area.

Active infrared SECURITY radar tested according to EN 16005 standards

**818XG-0010**



MR8701 Safety radar for automatic sliding doors 12 - 24 V AC - DC.  
 - Application height: 2 ÷ 3.5 m.  
 - Adjustable detection area.

Pair of SAFETY radars tested according to EN 16005 standards

**818XG-0046**



Pair of safety sensors with Laser technology.  
 - Detection zone: diagonal max 4 m.

Sensitive platforms

**818XG-0022**



MP8030 Sensitive floor-plate 800 x 300 mm.

**818XG-0023**



MP8060 Sensitive floor-plate 800 x 600 mm.

# ACCESSORIES

## SAFETY GLASS LEAVES WITHOUT HOLES THICKNESS 4+4 OR 5+5 mm\*

Accessories for safety glass leaves without holes thickness 4+4 or 5+5 mm

**818XG-0048**



Safety glass leaf connection  
L = 1000 mm.

**818XG-0049**



Safety glass leaf connection  
L = 2000 mm.

**818XG-0050**



Safety glass leaf connection  
L = 3000 mm.

**818XG-0051**



Safety glass leaf connection  
L = 6000 mm.

**818XG-0052**



Support for fastening 1 safety glass leaf.

**818XG-0053**



Leaf/wall spacer support K732.

**\* 818XG-0040**



MAM601 Black side gasket for  
tempered glass leaves thickness  
10 mm.  
L = 3000 mm.

**\* 818XG-0041**



MAM601T Transparent side  
gasket for tempered glass leaves  
thickness 10 mm.  
L = 3000 mm.

**\* 818XG-0042**



MAM600 Black central gasket for  
tempered glass leaves  
thickness 10 mm.  
L = 3000 mm.

**\* 818XG-0043**



MAM600T Transparent central  
gasket for tempered glass  
leaves thickness 10 mm.  
L = 3000 mm.

**NOTES: \* MAXIMUM LEAF WEIGHT: INTERMITTENT USE 120 KG - INTENSIVE USE 90 KG.**

- Fixing bracket 818XG-0052 must be added for each leaf.
- If the leaf needs to be moved closer to the wall, use spacer bracket 818XG-0053.

\* Items: 818XG-0040- 818XG-0041- 818XG-0042- 818XG-0043 pack no. 10 pcs.  
ONLY FOR SAFETY GLASSES THICKNESS 5+5 mm

# ACCESSORIES

## TEMPERED GLASS LEAVES WITH HOLES THICKNESS 8 - 10 - 12 mm

Accessories for tempered glass leaves with holes thickness 8- 10- 12 mm

**818XG-0054**



Perforated tempered glass leaf  
L = 1000 mm.

**818XG-0055**



Perforated tempered glass leaf  
L = 2000 mm.

**818XG-0056**



Perforated tempered glass leaf  
L = 3000 mm.

**818XG-0057**



Perforated tempered glass leaf  
L = 6000 mm.

**818XG-0058**



Support for fastening 1 perforated tempered  
glass leaf.

**818XG-0053**



Leaf/wall spacer support.

**818XG-0059**



Support for fixing 2 perforated tempered glass  
telescopic leaves.

**\* 818XG-0040**



MAM601 Black side gasket for  
tempered glass leaves thickness  
10 mm.  
L = 3000 mm.

**\* 818XG-0041**



MAM601T Transparent side  
gasket for tempered glass leaves  
thickness 10 mm.  
L = 3000 mm.

**\* 818XG-0042**



MAM600 Black central gasket for  
tempered glass leaves  
thickness 10 mm.  
L = 3000 mm.

**\* 818XG-0043**



MAM600T Transparent central  
gasket for tempered glass  
leaves thickness 10 mm.  
L = 3000 mm.

**NOTES:**

- For standard doors, the respective fastening bracket 818XG-0058 must be added for each leaf.
- For telescopic doors, the respective fastening bracket 818XG-0059 must be added for each pair of leaves.
- If the leaf needs to be moved closer to the wall, use spacer bracket 818XG-0053.

\* Items: 818XG-0040- 818XG-0041- 818XG-0042- 818XG-0043 pack no. 10 pcs.  
ONLY FOR TEMPERED GLASS THICKNESS 10 mm.

# ACCESSORIES

## FRAMED LEAVES

### Accessories for framed leaves

**818XG-0060**



Upper aluminum leaf profile.  
L = 1000 mm.

**818XG-0061**



Upper aluminum leaf profile.  
L = 2000 mm.

**818XG-0062**



Upper aluminum leaf profile.  
L = 3000 mm.

**818XG-0063**



Upper aluminum leaf profile.  
L = 6000 mm.

**818XG-0065**



Lower aluminum leaf guide profile.  
L = 1000 mm.

**818XG-0066**



Lower aluminum leaf guide profile.  
L = 2000 mm.

**818XG-0067**



Lower aluminum leaf guide profile.  
L = 3000 mm.

**818XG-0068**



Lower aluminum leaf guide profile.  
L = 6000 mm.

**818XG-0064**



Support kit for fixing one leaf.

**818XG-0069**



Fixed floor slide guide kit L = 15 mm.

**818XG-0070**



Slide guides kit for two telescopic leaves L = 45-50 mm.

**818XG-0071**



Adjustable floor slide guide kit L = 10-30 mm.

## ANTI-PANIC PUSH-TO-OPEN SYSTEM FOR FRAMED DOOR-LEAVES

Push-to-open anti-panic systems for FLUO-SL STANDARD and FLUO-SL BASIC

**818XC-0018**



Antipanic push-to-open kit for one moving leaf up to 1100 mm.

**818XC-0019**



Antipanic push-to-open kit for one moving leaf up to 1500 mm.

**818XC-0020**



Antipanic push-to-open kit for 2 moving leaves up to 1100 mm.

**818XC-0021**



Antipanic push-to-open kit for 2 moving leaves up to 1500 mm.

**818XC-0022**



Antipanic push-to-open kit for one moving leaf and one fixed leaf, up to 1100 mm.

**818XC-0023**



Antipanic push-to-open kit for one moving leaf and one fixed leaf, up to 1500 mm.

**818XC-0024**



Antipanic push-to-open kit for two moving leaves and two fixed leaves, up to 1100 mm.

**818XC-0025**



Antipanic push-to-open kit for two moving leaves and two fixed leaves, up to 1500 mm.

**NOTES:**

All ANTI-PANIC PUSH-TO-OPEN SYSTEM profiles for FRAMED LEAVES are NOT compatible with the S30 series.

# ACCESSORIES

- MASONRY WALL
- FIXED LEAVES
- MOVING LEAF/LEAVES

## SET OF COMPONENTS FOR S30 DOOR FRAMES

### Complete sets

#### 818XA-0062




Components SET for 2 sliding leaves.  
Maximum wall space dimensions:  
L = 1560 mm, H = 2490 mm.

#### 818XA-0063




Components SET for 2 sliding leaves.  
Maximum wall space dimensions:  
L = 2060 mm, H = 2490 mm.

#### 818XA-0064




Components SET for 1 sliding leaf, right-side or left-side opening.  
Maximum wall space dimensions:  
L = 1530 mm, H = 2490 mm.

#### 818XA-0065




Components SET for 1 sliding leaf in the hallway, right-side or left-side opening.  
Maximum wall space dimensions:  
L = 1560 mm, H = 2490 mm.

#### 818XA-0066




Components SET for 2 sliding leaves + 2 fixed leaves.  
Maximum wall space dimensions:  
L = 3000 mm, H = 2520 mm.

#### 818XA-0067



Components SET for 2 sliding leaves + 2 fixed leaves, right-side or left-side opening.  
Maximum wall space dimensions:  
L = 3000 mm, H = 2520 mm.

#### 818XA-0068



Components SET for 1 sliding leaf, + 1 fixed leaf in the hallway, right-side or left-side opening.  
Maximum wall space dimensions:  
L = 3000 mm, H = 2520 mm.

### NOTES:

The sets are complete with aluminum profiles, gaskets and components required to make up the frame.  
The sets of components for frames are not compatible with other profiles and antipanic push-to-open systems.

## CODE PAGE

74	818XG-0061
70	806SL-0260
70	806SL-0270
54	818SL-0050 / 59
54	818SL-0060 / 69
54	818SL-0070 / 79
54	818SL-0080 / 89
58	818SL-0090 / 98
58	818SL-0101 / 109
60	818SL-0130 / 139
60	818SL-0140 / 147
62	818ST-0010 / 20
62	818ST-0021 / 27
62	818ST-0030 / 40
62	818ST-0041 / 47
38	818SW-0010
38	818SW-0020
38	818SW-0090
38	818SW-0100
38	818SW-0110
38	818SW-0120
38	818SW-0130
40	818SW-0140
68	818XA-0010
67	818XA-0012
67	818XA-0014
67	818XA-0015
67	818XA-0016
67	818XA-0017
67	818XA-0018
67	818XA-0019
67	818XA-0021
67	818XA-0023
55	818XA-0030
67	818XA-0032
63	818XA-0033
68	818XA-0034
68	818XA-0035
39	818XA-0040
39	818XA-0041
39	818XA-0045
39	818XA-0046
39	818XA-0047
39	818XA-0048
39	818XA-0049
39	818XA-0051
67	818XA-0053
39	818XA-0059

## CODE PAGE

59	818XA-0060
68	818XA-0061
76	818XA-0062
76	818XA-0063
76	818XA-0064
76	818XA-0065
76	818XA-0066
76	818XA-0067
76	818XA-0068
41	818XA-0069
41	818XA-0070
41	818XA-0071
41	818XA-0072
41	818XA-0073
70	818XA-0074
70	818XA-0075
66	818XC-0010
66	818XC-0011
66	818XC-0012
66	818XC-0013
66	818XC-0014
66	818XC-0015
66	818XC-0016
66	818XC-0017
75	818XC-0018
75	818XC-0019
75	818XC-0020
75	818XC-0021
75	818XC-0022
75	818XC-0023
75	818XC-0024
75	818XC-0025
66	818XC-0029
66	818XC-0035
66	818XC-0037
39	818XC-0038
39	818XC-0039
39	818XC-0040
41	818XC-0041
71	818XG-0010
71	818XG-0011
71	818XG-0012
71	818XG-0013
71	818XG-0014
71	818XG-0015
71	818XG-0016
70	818XG-0019
71	818XG-0022

## CODE PAGE

71	818XG-0023
72	818XG-0040
72	818XG-0041
72	818XG-0042
72	818XG-0043
71	818XG-0046
70	818XG-0047
72	818XG-0048
72	818XG-0049
72	818XG-0050
72	818XG-0051
72	818XG-0052
72	818XG-0053
73	818XG-0054
73	818XG-0055
73	818XG-0056
73	818XG-0057
73	818XG-0058
73	818XG-0059
74	818XG-0060
74	818XG-0062
74	818XG-0063
74	818XG-0064
74	818XG-0065
74	818XG-0066
74	818XG-0067
74	818XG-0068
74	818XG-0069
74	818XG-0070
74	818XG-0071
55	8K18SL-003
55	8K18SL-004
59	8K18SL-006
61	8K18SL-007
63	8K18ST-001
63	8K18ST-002

**CAME** 





## CORPORATE HEADQUARTERS

**CAME S.p.A.**  
Via Martiri della Libertà, 15  
31030 Dosson di Casier  
Treviso - ITALY

## MANUFACTURING COMPANIES

**CAME PARKARE GROUP S.L.**  
Barcelona, SPAIN

**ENTROTEC Limited**  
Livingston, UK

**KEY MANAGEMENT SYSTEMS Limited**  
Buckinghamshire, UK

**NEPOS SISTEMAS DE CONTROLE E AUTOMAÇÃO EM ESTACIONAMENTO E TRÁFEGO LTDA**  
São Paulo, BRAZIL

**ÖZAK GEÇİŞ TEKNOLOJILERI SAN. TIC. A.Ş.**  
Kocaeli, TÜRKIYE

## COMMERCIAL BRANCHES EUROPE

**ITALY**  
CAME ITALIA S.r.l.  
Treviso

**BELGIUM**  
CAME BENELUX S.A.  
Lessines

**CROATIA**  
CAME ADRIATIC d.o.o.  
Kastav

**FRANCE**  
CAME FRANCE S.A.S.  
Paris

**GERMANY**  
CAME DEUTSCHLAND GmbH  
Stuttgart

**IRELAND**  
CAME BPT IRELAND LIMITED  
Dublin

**THE NETHERLANDS**  
CAME NEDERLAND B.V.  
Breda

**POLAND**  
CAME POLAND Sp. z o.o.  
Warszawa

**PORTUGAL**  
CAME PORTUGAL,  
UNIPESSOAL, LDA  
Lisbon

**RUSSIA**  
UMC RUS LLC  
Moscow

**SPAIN**  
CAME SPAIN S.A.  
Madrid

**THE UNITED KINGDOM**  
CAME BPT UK LIMITED  
Nottingham

## COMMERCIAL BRANCHES ASIA

**U.A.E.**  
CAME GULF FZCO  
Dubai

**CINA**  
CAME AUTOMATION SYSTEM CO  
Shanghai

## COMMERCIAL BRANCHES AMERICAS

**BRAZIL**  
CAME DO BRASIL, INDÚSTRIA,  
IMPORTAÇÃO, EXPORTAÇÃO,  
COMÉRCIO E SERVIÇOS DE  
AUTOMAÇÃO LTDA  
São Paulo

**MEXICO**  
CAME AUTOMATISMOS §  
DE MEXICO S. DE R.L. DE C.V.  
Mexico City

**PERÚ**  
CAME PARKARE PERU S.A.C.  
Lima

**USA**  
CAME AMERICAS AUTOMATION LLC  
Miami, FL

**CANADA**  
CAME CANADA Inc.  
Toronto



© CAME SPA - KACENAQ024 - 2024 - EN EXPORT  
CAME RESERVES THE RIGHT TO MAKE ANY CHANGES TO THIS DOCUMENT, AT ANY TIME.  
EVEN PARTIAL REPRODUCTION IS PROHIBITED.



**CAME S.p.A.**  
is certified for quality, environmental friendliness  
and safety by the following standards:  
ISO 9001  
ISO 14001  
ISO 45001