

Mondrian M6

Ø 55 mm



Main features

- 230 V AC - 50 Hz
- Mechanical limit-switch
- Built-in emergency operation



Shutters



Awnings



Emergency
operation



Cable-
based

Specific features

Can be used on a 70 mm round or octagonal tube.

Manual mechanical limit-switch with screw-based progressive adjustment.

Manually activated with emergency wand.

Reduction ratio: 1:34.

Connection cable included: 2.5 m.

Control accessories



WEATHER UNIT

Wind sensor.



COMMAND ACCESSORIES

Buttons and switches.



EMERGENCY OPERATIONS

Wands, joints
and eyelets.



Mondrian M6

Ø 55 mm



KDEP#TEN2QA4S112

Dimensions (mm)

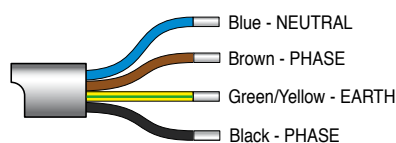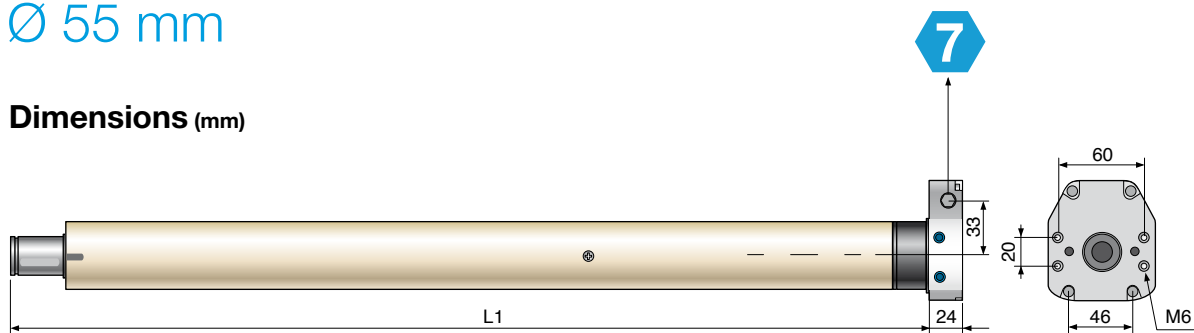

Mondrian M6

CODE 001Y6080A121MOM 001Y6100A101MOM 001Y6120A081MOM

Technical information

Torque (Nm)	80	100	120
Rpm speed (turns/min)	12	10	8
Hoisted weight (Kg)*	114	143	171
Limit-switch turns (turns)	22	22	22
Duration of operation (min)	4	4	4
Power draw (A)	1.71	1.68	1.64
Power (W)	396	385	375
Protection rating (IP)	44	44	44
Length (mm) = L1	610	610	630
Weight (Kg)	5.08	5.25	5.6
Package dimensions (mm)	685x120x120	685x120x120	750x120x120
Weight of packaged motor (kg)	5.48	5.65	6.6
Cable length (m)	2.5	2.5	2.5
Cable section (mm) ²	4G 0.75	4G 0.75	4G 0.75

Specific packaging available for contractors / installers.

* Calculated load per 70 mm roller.

PRODUCTS



www.came.com