

Mondrian R4

Ø 35 mm



Main characteristics

- 230 V AC - 50 Hz
- Mechanical limit switch
- Built-in 433.92 MHz radio receiver



Shutters



Blinds



Radio-based

Specific features

Can be used on a 40 mm round or octagonal tube.

Manual mechanical limit switch with screw-based progressive adjustment.

Ideal for small awning boxes.

Universal head for applying any type of anchoring plate.

Connection cable included: 2.5 m.

Control accessories



TRANSMITTERS/ TIMERS

Transmitters with 1-2-5-15 channels.
Timers with 1-5 channels.



WEATHER

Sensors and weather stations.



BACK KLT

Awning protection, radio device.



Mondrian R4

Ø 35 mm



KDEP#TEN2/LA4S122

Dimensions (mm)

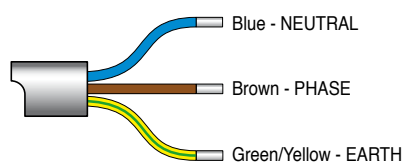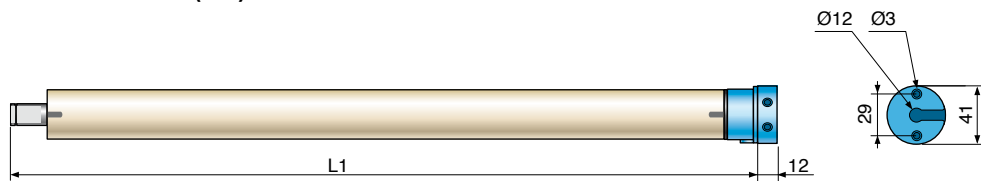

Mondrian R4

CODE

001Y4006A281MOR

001Y4010A171MOR

Technical information

Torque (Nm)	6	10
Speed RPM (turns/min)	28	17
Hoisted weight (kg)*	17	28
Limit switch turns (turns)	30	30
Duration of operation (min)	4	4
Power draw (A)	0.53	0.53
Power (W)	121	121
Protection rating (IP)	44	44
Length (mm) = L1	578	578
Weight (kg)	1.64	1.76
Package dimensions (mm)	630x70x70	630x70x70
Weight of packaged motor (kg)	1.9	1.9
Cable length (m)	2.5	2.5
Cable cross-section (mm) ²	3G 0.75	3G 0.75

* Load calculated for 40 mm roller.

PRODUCTS



www.came.com