

# Mondrian 5

Ø 45 mm



## Main features

- 230 V AC - 50 Hz
- Mechanical limit-switch
- Optional outdoor receiver



Shutters



Awnings



Blinds



Cable-based



5 Year Warranty

## Specific features

Can be used on a 50 mm round or octagonal tube.

Manual mechanical limit switch-with screw-based progressive adjustment.

Universal head for applying any type of anchoring plate.

Connection cable included: 2.5 m.

## Control accessories



### TRANSMITTERS AND TIMERS

up to 15 channels.



### RECEIVERS

Outdoor receivers.



### WEATHER UNIT

Wind sensor.



### BACH

Fabric guard, radio device.



### COMMAND ACCESSORIES

Buttons and switches.



# Mondrian 5

Ø 45 mm



KDEP#TEN2MA4S112

## Dimensions (mm)

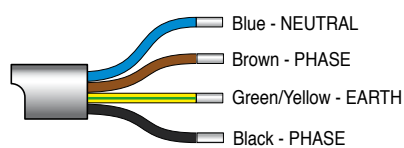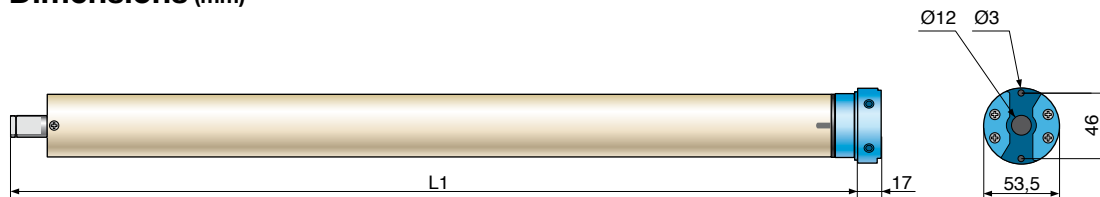

## Mondrian 5



CODE	001Y5010A151MO	001Y5010A261MO	001Y5020A151MO	001Y5030A151MO	001Y5040A151MO	001Y5050A121MO
------	----------------	----------------	----------------	----------------	----------------	----------------

## Technical information

Torque (Nm)	10	10	20	30	40	50
Rpm speed (turns/min)	15	26	15	15	15	12
Hoisted weight (Kg)*	18	18	36	55	74	92
Limit-switch turns (turns)	22	22	22	22	22	22
Duration of operation (min)	4	4	4	4	4	4
Power draw (A)	0.49	0.64	0.64	0.83	0.86	0.89
Power (W)	112	145	145	191	198	205
Protection rating (IP)	44	44	44	44	44	44
Length (mm) = L1	453	453	453	523	523	523
Weight (Kg)	1.88	2.5	2.05	2.31	2.44	2.6
Package dimensions (mm)	518x80x80	518x80x80	518x80x80	585x80x80	585x80x80	585x80x80
Weight of packaged motor (kg)	2.05	2.68	2.25	2.5	2.65	2.8
Cable length (m)	2.5	2.5	2.5	2.5	2.5	2.5
Cable section (mm) <sup>2</sup>	4G 0.75	4G 0.75	4G 0.75	4G 0.75	4G 0.75	4G 0.75

Specific packaging available for contractors / installers.

\* Calculated load per 50 mm roller.

PRODUCTS



www.came.com