

Klimt 5

Ø 45 mm



Main characteristics

- 230 V AC - 50 Hz
- Electronic limit switch
- Built-in 433.92 MHz radio receiver



Shutters



Awnings



Radio-based

Specific features

Can be used on a 50 mm round or octagonal tube.

Ideal for small awning boxes.

Universal head for applying any type of anchoring plate.

Adjustment of the middle endpoint (partial opening) possible.

Connection cable included: 2.5 m.

Control accessories



TRANSMITTERS/ TIMERS

Transmitters with 1-2-5-15 channels.
Timers with 1-5 channels.



WEATHER

Sensors and weather stations.



BACK KLT

Awning protection, radio device.



Klimt 5

Ø 45 mm



KDEP#TEN3EA4S112

Dimensions (mm)

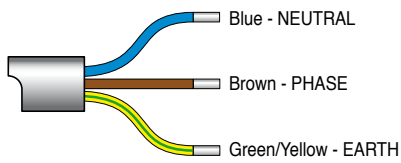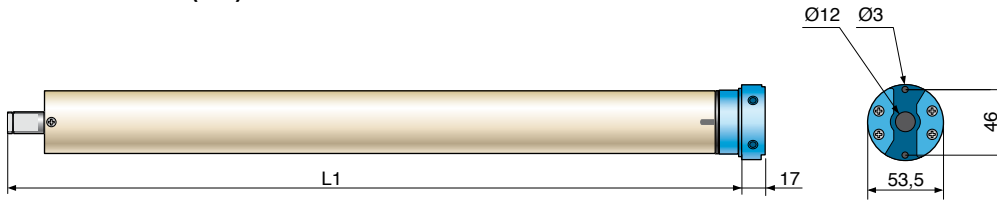

Klimt 5

CODE 001Y5010A151KL 001Y5010A261KL 001Y5020A151KL 001Y5030A151KL 001Y5040A151KL 001Y5050A121KL

Technical information

Torque (Nm)	10	10	20	30	40	50
Speed RPM (turns/min)	15	26	15	15	15	12
Hoisted weight (kg)*	18	18	36	55	74	92
Limit switch turns (turns)	-	-	-	-	-	-
Duration of operation (min)	4	4	4	4	4	4
Power draw (A)	0.48	0.69	0.69	0.87	0.95	0.99
Power (W)	113	161	161	200	218	228
Protection rating (IP)	44	44	44	44	44	44
Length (mm) = L1	594	594	594	624	624	624
Weight (kg)	1.88	2.12	2.07	2.4	2.76	2.76
Package dimensions (mm)	660x80x80	660x80x80	660x80x80	660x80x80	660x80x80	660x80x80
Weight of packaged motor (kg)	2.1	2.4	2.3	2.7	3	3
Cable length (m)	2.5	2.5	2.5	2.5	2.5	2.5
Cable cross-section (mm)²	3G 0.75	3G 0.75	3G 0.75	3G 0.75	3G 0.75	3G 0.75

* Load calculated for 50 mm roller.

PRODUCTS



www.came.com